


Keilriemenscheibe SPZ mit Taper


Pulley SPZ with Taper

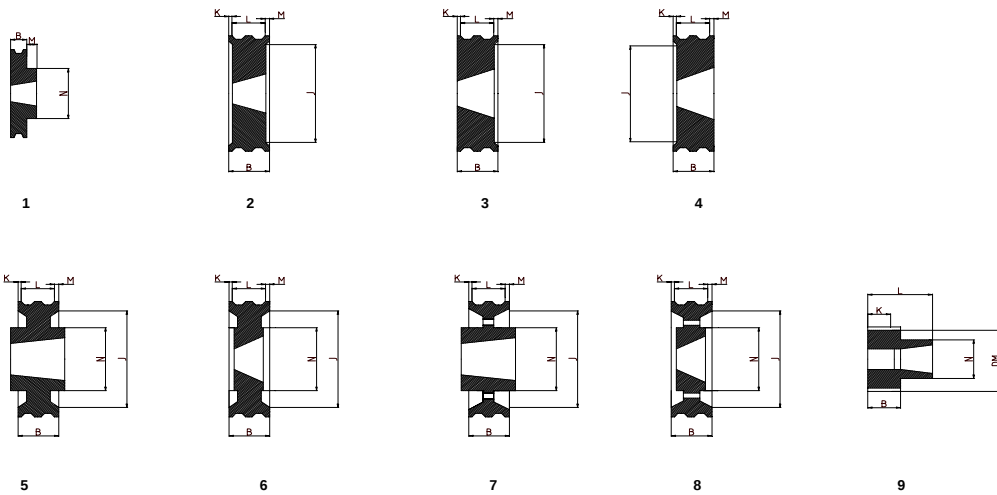

DM	Rillen Groove	Buchse Bush	Max.Bohr. Max. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
50	1	1008	25	9	16	26	15	37	0	60	0,3
50	2	1008	25	9	28	26	27	49	0	60	0,4
56	1	1008	25	9	16	30	15	37	0	60	0,4
56	2	1008	28	9	28	30	27	49	0	60	0,5
60	1	1008	25	1	16	0	0	22	6	55	0,2
60	2	1008	28	9	28	34	27	49	0	64	0,6
63	1	1008	28	1	16	0	0	22	6	60	0,2
63	2	1008	28	3	28	37	6	22	0	0	0,3
63	3	1008	28	3	40	37	18	22	0	0	0,4
67	1	1008	28	1	16	0	0	22	6	60	0,3
67	2	1008	28	3	28	38	6	22	0	0	0,4
67	3	1008	28	3	40	38	18	22	0	0	0,5
71	1	1008	28	1	16	0	0	22	6	60	0,3
71	2	1008	28	3	28	42	6	22	0	0	0,4
71	3	1008	28	3	40	42	18	22	0	0	0,6
75	1	1008	28	1	16	0	0	22	6	60	0,4
75	2	1210	32	3	28	46	3	25	0	0	0,4
75	3	1210	32	3	40	46	15	25	0	0	0,5
80	1	1210	32	1	16	0	0	26,5	10,5	75	0,5
80	2	1210	32	3	28	51	3	25	0	0	0,6
80	3	1210	32	3	40	51	15	25	0	0	0,7
80	4	1210	32	3	52	51	27	25	0	0	0,8
85	1	1210	32	1	16	0	0	25	9	83	0,6
85	2	1610	42	3	28	56	3	25	0	0	0,5
85	3	1610	42	3	40	56	15	25	0	0	0,6
85	4	1610	42	3	52	56	27	25	0	0	0,9
85	5	1610	42	3	64	56	39	25	0	0	1,0
90	1	1210	32	1	16	0	0	26,5	10,5	83	0,7
90	2	1610	42	3	28	61	3	25	0	0	0,7
90	3	1610	42	3	40	61	15	25	0	0	0,8
90	4	1610	42	3	52	61	27	25	0	0	1,0
90	5	1610	42	3	64	61	39	25	0	0	1,2
95	1	1210	32	1	16	0	0	26,5	10,5	83	0,7
95	2	1610	42	3	28	66	3	25	0	0	0,8
95	3	1610	42	3	40	66	15	25	0	0	0,9
95	4	1610	42	3	52	66	27	25	0	0	1,1
95	5	1610	42	3	64	66	39	25	0	0	1,3
100	1	1210	32	1	16	0	0	25	9	83	0,8
100	2	1610	42	3	28	71	3	25	0	0	0,9
100	3	1610	42	3	40	71	15	25	0	0	1,1
100	4	1610	42	3	52	71	27	25	0	0	1,1
100	5	2012	50	3	64	71	32	32	0	0	1,3
100	6	2012	50	3	76	71	44	32	0	0	1,4

Keilriemenscheibe SPZ mit Taper


Pulley SPZ with Taper

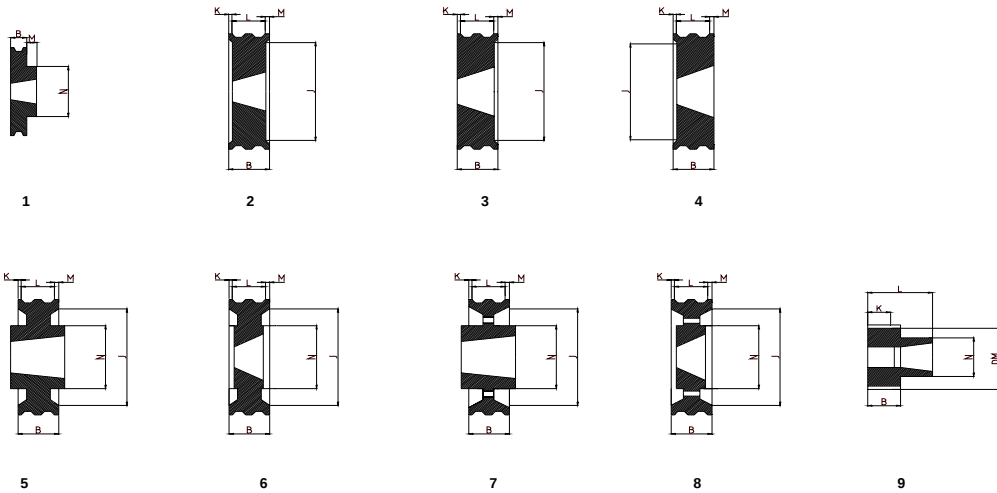

DM	Rillen Groove	Buchse Bush	Max.Bohr. Max. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
106	1	1610	42	1	16	0	0	25	9	83	0,9
106	2	1610	42	3	28	0	0	28	0	0	1,1
106	3	1610	42	3	40	77	15	25	0	0	1,3
106	4	1610	42	3	52	77	27	25	0	0	1,3
106	5	2012	50	3	64	77	32	32	0	0	1,5
106	6	2012	50	3	76	77	44	32	0	0	1,6
112	1	1610	42	1	16	0	0	25	9	92	1,0
112	2	1610	42	3	28	83	3	25	0	0	1,3
112	3	2012	50	3	40	83	8	32	0	0	1,3
112	4	2012	50	3	52	83	20	32	0	0	1,5
112	5	2012	50	3	64	83	32	32	0	0	1,8
112	6	2012	50	3	76	83	44	32	0	0	1,9
118	1	1610	42	1	16	0	0	25	9	92	0,9
118	2	1610	42	3	28	89	3	25	0	0	1,3
118	3	2012	50	3	40	89	8	32	0	0	1,6
118	4	2012	50	3	52	89	20	32	0	0	1,8
118	5	2012	50	3	64	89	32	32	0	0	1,8
118	6	2517	65	3	76	89	31	45	0	0	2,0
125	1	1610	42	1	16	0	0	25	9	92	1,0
125	2	1610	42	3	28	96	3	25	0	0	1,4
125	3	2012	50	2	40	96	0	32	8	0	1,8
125	4	2012	50	2	52	96	0	32	20	0	2,2
125	5	2012	50	3	64	96	32	32	0	0	2,3
125	6	2517	65	3	76	96	31	45	0	0	2,5
132	1	1610	42	1	16	0	0	25	9	92	1,1
132	2	1610	42	3	28	111	3	25	0	0	1,5
132	3	2012	50	2	40	111	0	32	8	0	2,3
132	4	2012	50	2	52	111	0	32	20	0	2,5
132	5	2517	65	3	64	111	19	45	0	0	2,7
132	6	2517	65	3	76	111	31	45	0	0	2,9
140	1	1610	42	1	16	0	0	25	9	92	1,2
140	2	1610	42	2	28	111	0	25	3	0	1,7
140	3	2012	50	2	40	111	0	32	8	0	2,6
140	4	2012	50	2	52	111	0	32	20	0	2,9
140	5	2517	65	2	64	111	0	45	19	0	3,2
140	6	2517	65	2	76	111	0	45	31	0	3,5
140	8	2517	65	4	100	111	27,5	45	27,5	0	4,0
150	1	1610	42	1	16	0	0	25	9	92	1,2
150	2	2012	50	1	28	0	0	33,5	5,5	112	2,0
150	3	2012	50	2	40	121	0	32	8	0	3,1
150	4	2517	65	2	52	121	0	45	7	0	3,7
150	5	2517	65	2	64	121	0	45	19	0	4,0
150	6	2517	65	2	76	121	0	45	31	0	4,4
150	8	2517	65	4	100	121	27,5	45	27,5	0	5,1

Keilriemenscheibe SPZ mit Taper


Pulley SPZ with Taper

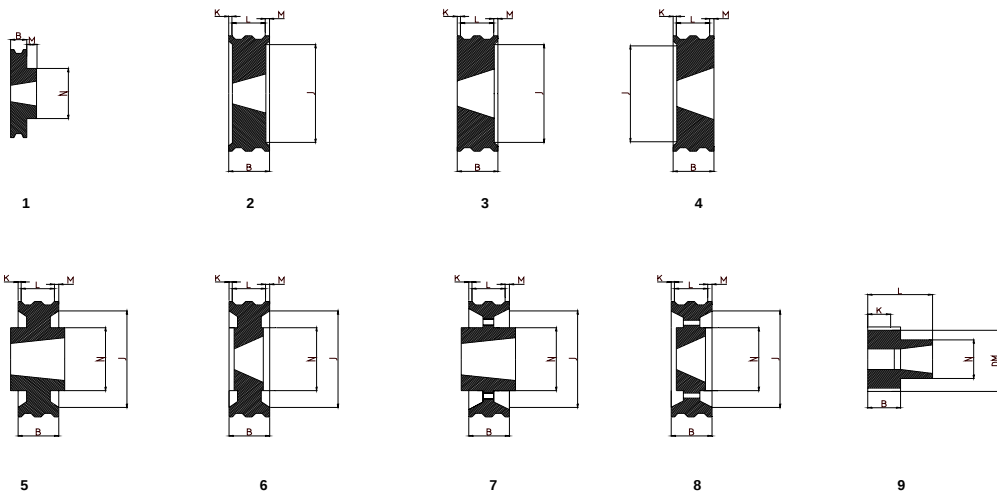

	Rillen	Buchse	Max.Bohr.								Gewicht
DM	Groove	Bush	Max. Bore	Type	B	J	K	L	M	N	Weight
160	1	1610	42	1	16	0	0	25	9	92	1,3
160	2	2012	50	1	28	0	0	32	4	112	2,5
160	3	2012	50	2	40	131	0	32	8	0	3,6
160	4	2517	65	2	52	131	0	45	7	0	4,4
160	5	2517	65	2	64	131	0	45	19	0	4,8
160	6	2517	65	2	76	131	0	45	31	0	5,2
160	8	2517	65	4	100	131	27,5	45	27,5	0	5,6
170	1	1610	42	1	16	0	0	25	9	92	1,5
170	2	2012	50	1	28	0	0	32	4	112	2,5
170	3	2012	50	6	40	141	0	32	8	112	4,2
170	4	2517	65	2	52	141	0	45	7	0	5,3
170	5	2517	65	2	64	141	0	45	19	0	5,9
170	6	2517	65	2	76	141	0	45	31	0	6,5
170	8	2517	65	4	100	141	27,5	45	27,5	0	6,8
180	1	1610	42	1	16	0	0	25	9	92	1,6
180	2	2012	50	1	28	0	0	32	4	112	2,5
180	3	2012	50	6	40	151	0	32	8	112	4,8
180	4	2517	65	6	52	151	0	45	7	124	6,1
180	5	2517	65	6	64	151	0	45	19	124	6,3
180	6	2517	65	6	76	151	0	45	31	124	6,8
180	8	3020	75	4	100	151	24,5	51	24,5	0	7,1
190	1	1610	42	1	16	0	0	25	9	92	1,8
190	2	2012	50	1	28	0	0	32	4	112	2,6
190	3	2012	50	6	40	161	0	32	8	112	4,9
190	4	2517	65	6	52	161	0	45	7	124	5,3
190	5	2517	65	6	64	161	0	45	19	124	6,3
190	6	2517	65	6	76	161	0	45	31	124	6,9
190	8	3020	75	4	100	161	24,5	51	24,5	0	8,2
200	1	2012	50	1	16	0	0	32	16	112	2,3
200	2	2012	50	1	28	0	0	32	4	112	2,8
200	3	2012	50	6	40	171	0	32	8	112	3,5
200	4	2517	65	6	52	171	3,5	45	3,5	124	4,7
200	5	2517	65	6	64	171	9,5	45	9,5	124	5,5
200	6	2517	65	6	76	171	15,5	45	15,5	124	6,1
200	8	3020	75	4	100	171	24,5	51	24,5	0	9,3
224	1	2012	50	5	16	195	8	32	8	112	2,5
224	2	2012	50	5	28	195	2	32	2	112	3,2
224	3	2012	50	6	40	195	4	32	4	112	3,9
224	4	2517	65	6	52	195	3,5	45	3,5	124	5,2
224	5	2517	65	6	64	195	9,5	45	9,5	124	6,0
224	6	2517	65	6	76	195	15,5	45	15,5	124	6,6
224	8	3020	75	4	100	195	24,5	51	24,5	0	11,8

Keilriemenscheibe SPZ mit Taper


Pulley SPZ with Taper

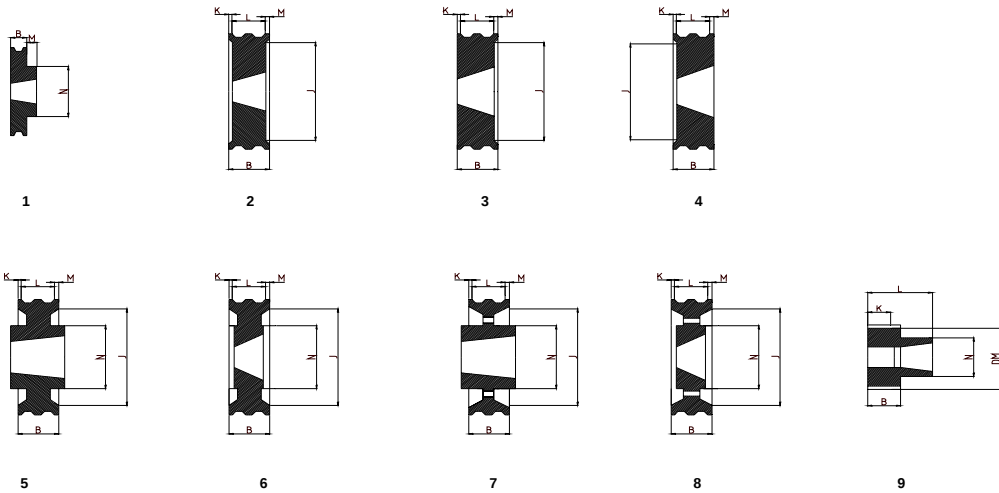

DM	Rillen Groove	Buchse Bush	Max.Bohr. Max. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
250	1	2012	50	7	16	221	8,0	32	8,0	112	2,8
250	2	2012	50	7	28	221	2,0	32	2,0	112	3,5
250	3	2012	50	8	40	221	4,0	32	4,0	112	4,3
250	4	2517	65	8	52	221	3,5	45	3,5	124	5,7
250	5	2517	65	8	64	221	9,5	45	9,5	124	6,4
250	6	2517	65	8	76	221	15,5	45	15,5	124	7,0
250	8	3020	75	8	100	221	24,5	51	24,5	145	10,5
280	1	2012	50	7	16	251	8,0	32	8,0	112	2,9
280	2	2012	50	7	28	251	2,0	32	2,0	112	4,0
280	3	2517	65	7	40	251	2,5	45	2,5	124	5,3
280	4	2517	65	8	52	251	3,5	45	3,5	124	6,4
280	5	2517	65	8	64	251	9,5	45	9,5	124	7,1
280	6	2517	65	8	76	251	15,5	45	15,5	124	7,8
280	8	3020	75	8	100	251	24,5	51	24,5	145	10,8
315	1	2012	50	7	16	286	8,0	32	8,0	112	3,1
315	2	2012	50	7	28	286	2,0	32	2,0	112	4,2
315	3	2517	65	7	40	286	2,5	45	2,5	124	6,1
315	4	2517	65	8	52	286	3,5	45	3,5	124	7,6
315	5	2517	65	8	64	286	9,5	45	9,5	124	8,6
315	6	2517	65	8	76	286	15,5	45	15,5	124	9,3
315	8	3020	75	8	100	286	24,5	51	24,5	145	12,9
355	1	2012	50	7	16	326	8,0	32	8,0	112	3,5
355	2	2012	50	7	28	326	2,0	32	2,0	112	5,1
355	3	2517	65	7	40	326	2,5	45	2,5	124	7,3
355	4	2517	65	8	52	326	3,5	45	3,5	124	8,9
355	5	2517	65	8	64	326	9,5	45	9,5	124	10,0
355	6	2517	65	8	76	326	15,5	45	15,5	124	10,7
355	8	3030	75	8	100	326	12,0	76	12,0	145	16,0
400	1	2012	50	7	16	371	8,0	32	8,0	112	6,0
400	2	2517	65	7	28	371	8,5	45	8,5	124	6,3
400	3	2517	65	7	40	371	2,5	45	2,5	124	8,0
400	4	2517	65	8	52	371	3,5	45	3,5	124	10,1
400	5	3020	75	8	64	371	6,5	51	6,5	145	11,7
400	6	3020	75	8	76	371	12,5	51	12,5	145	14,5
400	8	3030	75	8	100	371	12,0	76	12,0	145	18,2
450	1	2517	65	7	16	424	14,5	45	14,5	120	6,1
450	2	2517	65	7	28	424	8,5	45	8,5	120	8,2
450	3	2517	65	7	40	424	2,5	45	2,5	120	9,8
450	4	3020	75	8	52	424	0,5	51	0,5	145	11,8
450	5	3020	75	8	64	424	6,5	51	6,5	145	13,9
450	6	3030	75	8	76	424	0	76	0	145	16,9
450	8	3535	90	8	100	424	5,5	89	5,5	178	24,0

Keilriemenscheibe SPZ mit Taper


Pulley SPZ with Taper

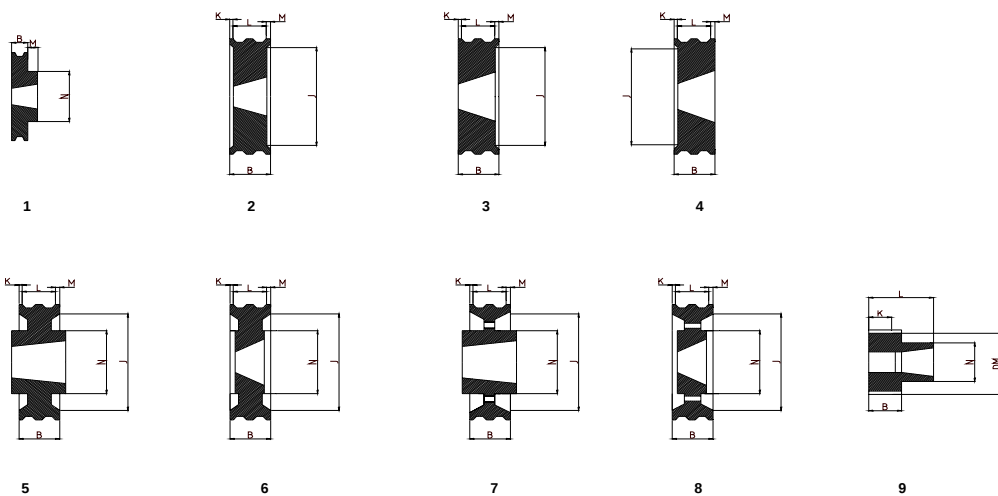

DM	Rillen Groove	Buchse Bush	Max. Bohr. Max. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
500	1	2517	65	7	16	471	14,5	45	14,5	124	6,7
500	2	2517	65	7	28	471	8,5	45	8,5	124	9,1
500	3	2517	65	7	40	471	2,5	45	2,5	124	11,4
500	4	3020	75	8	52	471	0,5	51	0,5	159	14,3
500	5	3020	75	8	64	471	6,5	51	6,5	145	17,6
500	6	3020	75	8	76	471	12,5	51	12,5	145	19,9
500	8	3535	90	8	100	471	5,5	89	5,5	178	26,0
630	2	2517	65	7	28	601	8,5	45	8,5	124	11,7
630	3	2517	65	7	40	601	2,5	45	2,5	124	15,9
630	4	3020	75	8	52	601	0,5	51	0,5	145	20,0
630	5	3020	75	8	64	601	6,5	51	6,5	145	22,7
630	6	3525	90	8	76	601	5,5	65	5,5	178	30,9
630	6	3535	90	7	76	601	6,5	89	6,5	178	33,6
630	8	3535	90	8	100	601	5,5	89	5,5	178	35,8

Keilriemenscheibe SPA mit Taper


Pulley SPA with Taper

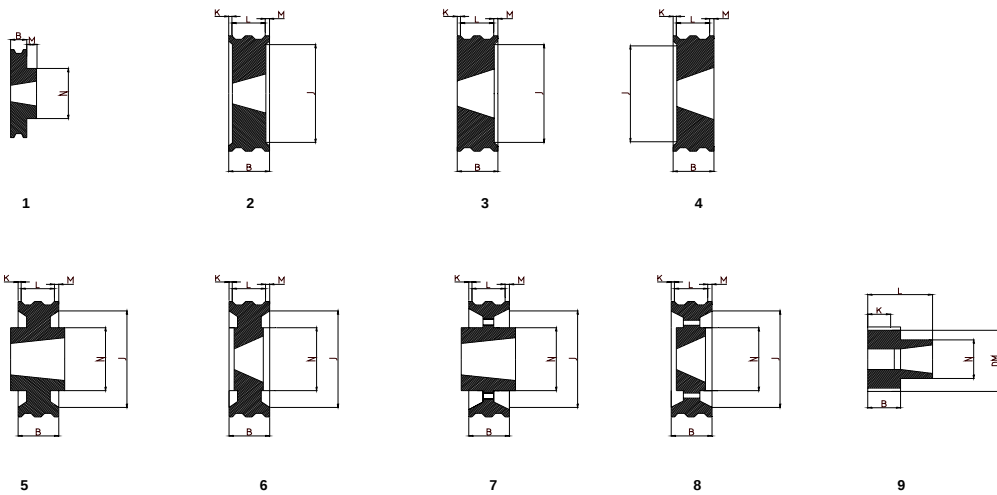

DM	Rillen Groove	Buchse bush	M.Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
63	1	1108	28	9	20	31	18	40	0	68,5	0,6
63	2	1108	28	9	35	31	33	55	0	68,5	0,8
67	1	1108	28	1	20	0	0	22	2	60	0,3
67	2	1108	28	3	35	35	13	22	0	0	0,5
71	1	1108	28	1	20	0	0	22	2	60	0,3
71	2	1108	28	3	35	39	13	22	0	0	0,5
71	3	1108	28	3	50	39	28	22	0	0	0,7
75	1	1108	28	1	20	0	0	22	2	60	0,4
75	2	1108	28	3	35	43	13	22	0	0	0,6
75	3	1108	32	3	50	43	28	22	0	0	0,8
80	1	1210	32	1	20	0	0	25	5	80	0,5
80	2	1210	32	3	35	50	10	25	0	0	0,6
80	3	1210	32	3	50	50	25	25	0	0	0,9
85	1	1210	32	1	20	0	0	25	5	80	0,6
85	2	1210	32	3	35	55	10	25	0	0	0,7
85	3	1210	32	3	50	55	25	25	0	0	1,0
90	1	1210	32	1	20	0	0	25	5	80	0,7
90	2	1610	42	3	35	60	10	25	0	0	0,7
90	3	1610	42	3	50	60	23,5	26,5	0	0	1,0
90	4	1610	42	3	65	60	25	25	0	0	1,2
95	1	1210	32	1	20	0	0	25	5	80	0,8
95	2	1610	42	3	35	65	10	25	0	0	0,9
95	3	1610	42	3	50	65	23,5	26,5	0	0	1,1
95	4	1610	42	3	65	65	40	25	0	0	1,4
100	1	1610	42	1	20	0	0	25	5	92	0,8
100	2	1610	42	3	35	65	10	25	0	0	0,9
100	3	1610	42	2	50	65	0	25	25	0	1,2
100	4	1610	42	2	65	65	0	25	40	0	1,7
100	5	1610	42	3	80	65	55	25	0	0	1,9
100	6	1610	42	4	95	65	30	25	40	0	2,3
106	1	1610	42	1	20	0	0	25	5	92	0,9
106	2	1610	42	3	35	70	10	25	0	0	1,1
106	3	1610	42	2	50	70	0	25	25	0	1,4
106	4	2012	50	3	65	70	33	32	0	0	2,0
106	5	2012	50	3	80	70	48	32	0	0	2,0
106	6	2012	50	3	95	70	63	32	0	0	2,4
112	1	1610	42	1	20	0	0	25	5	92	1,0
112	2	1610	42	3	35	77	10	25	0	0	1,2
112	3	2012	50	3	50	77	18	32	0	0	1,3
112	4	2012	50	3	65	77	33	32	0	0	1,9
112	5	2012	50	3	80	77	48	32	0	0	2,1
112	6	2012	50	3	95	77	63	32	0	0	2,4
118	1	1610	42	1	20	0	0	25	5	85	1,2

Keilriemenscheibe SPA mit Taper


Pulley SPA with Taper

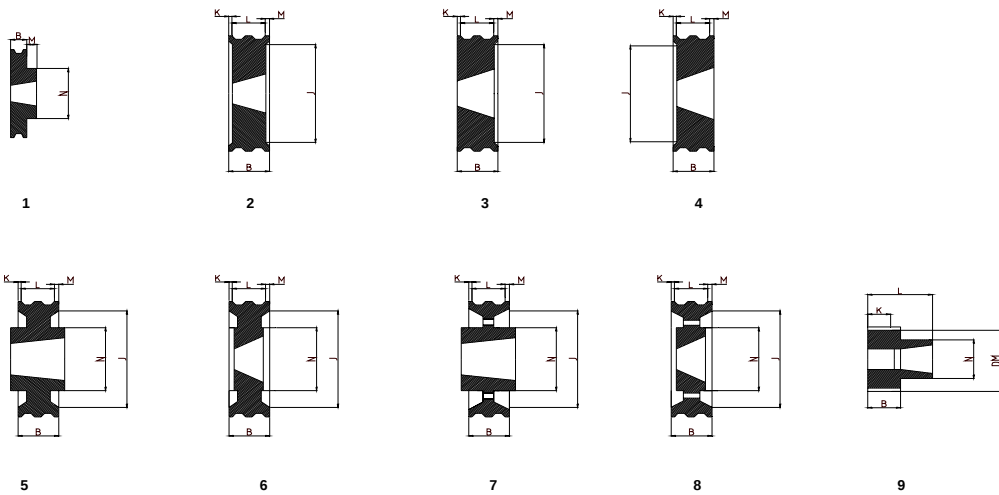

DM	Rillen Groove	Buchse bush	M.Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
118	2	1610	42	3	35	84	10	25	0	0	1,4
118	3	2012	50	2	50	84	0	32	18	0	1,8
118	4	2012	50	2	65	84	0	32	33	0	2,0
118	5	2012	50	2	80	84	0	32	48	0	2,4
118	6	2012	50	3	95	84	63	32	0	0	2,7
125	1	1610	42	1	20	0	0	25	5	92	1,4
125	2	1610	42	2	35	90	0	25	10	0	1,7
125	3	2012	50	2	50	90	0	32	18	0	2,0
125	4	2012	50	2	65	90	0	32	33	0	2,5
125	5	2012	50	2	80	90	0	32	48	0	2,7
125	6	2012	50	4	95	90	31,5	32	31,5	0	3,0
132	1	1610	42	1	20	0	0	26,5	6,5	92	1,6
132	2	2012	50	2	35	98	0	32	3	0	1,8
132	3	2012	50	2	50	98	0	32	18	0	2,3
132	4	2517	65	2	65	98	0	45	20	0	2,6
132	5	2517	65	2	80	98	0	45	35	0	2,9
132	6	2517	65	4	95	98	25	45	25	0	3,3
140	1	1610	42	1	20	0	0	25	5	92	1,8
140	2	2012	50	2	35	105	0	32	3	0	2,0
140	3	2517	65	2	50	105	0	45	5	0	2,8
140	4	2517	65	2	65	105	0	45	20	0	3,1
140	5	2517	65	2	80	105	0	45	35	0	3,4
140	6	2517	65	4	95	105	25	45	25	0	3,8
150	1	1610	42	1	20	0	0	25	5	92	1,4
150	2	2012	50	2	35	115	0	32	3	0	2,4
150	3	2517	65	2	50	115	0	45	5	0	3,5
150	4	2517	65	2	65	115	0	45	20	0	3,8
150	5	2517	65	2	80	115	0	45	35	0	4,2
150	6	2517	65	4	95	115	25	45	25	0	4,8
160	1	1610	42	5	20	125	0	25	5	92	1,9
160	2	2012	50	2	35	125	0	32	3	0	2,9
160	3	2517	65	2	50	125	0	45	5	0	3,9
160	4	2517	65	2	65	125	0	45	20	0	4,4
160	5	2517	65	2	80	125	0	45	35	0	5,1
160	6	2517	65	4	95	125	25	45	25	0	5,8
170	1	1610	42	5	20	135	0	25	5	92	2,0
170	2	2012	50	2	35	135	0	32	3	0	3,1
170	3	2517	65	2	50	135	0	45	5	0	4,6
170	4	2517	65	2	65	135	0	45	20	0	5,5
170	5	3020	75	2	80	135	0	51	29	0	5,9
170	6	3020	75	4	95	135	22	51	22	0	6,5
180	1	1610	42	5	20	145	0	25	5	92	2,1
180	2	2012	50	6	35	145	0	32	3	110	3,4

Keilriemenscheibe SPA mit Taper


Pulley SPA with Taper

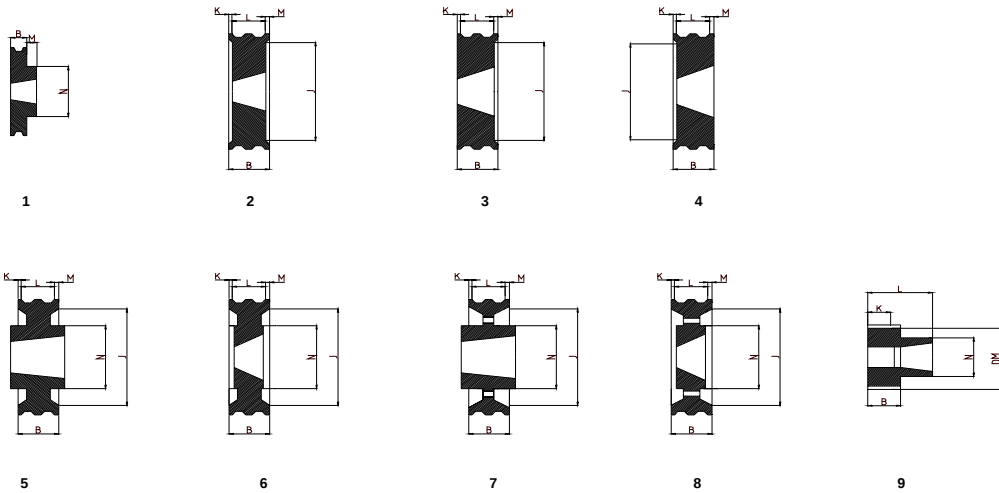

DM	Rillen Groove	Buchse Bush	M.Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
180	3	2517	65	2	50	145	0	45	5	0	5,1
180	4	2517	65	2	65	145	0	45	20	0	5,9
180	5	3020	75	2	80	145	0	51	29	0	6,2
180	6	3020	75	4	95	145	22	51	22	0	6,7
190	1	1610	42	5	20	155	0	25	5	92	2,3
190	2	2012	55	6	35	155	0	32	3	110	3,8
190	3	2517	65	2	50	155	0	45	5	0	5,4
190	4	2517	65	2	65	155	0	45	20	0	6,8
190	5	3020	75	2	80	155	0	51	29	0	7,4
190	6	3020	75	4	95	155	22	51	22	0	8,1
200	1	2012	50	5	20	165	0	32	12	112	2,6
200	2	2517	65	5	35	165	0	45	10	124	4,1
200	3	2517	65	6	50	165	0	45	5	124	4,9
200	4	3020	75	2	65	165	0	51	14	0	7,4
200	5	3020	75	4	80	165	14,5	51	14,5	0	8,4
200	6	3020	75	4	95	165	22	51	22	0	9,4
212	1	2012	50	5	20	177	0	32	12	112	2,7
212	2	2517	65	5	35	177	0	45	10	124	4,3
212	3	2517	65	6	50	177	0	45	5	124	5,2
212	4	3020	75	2	65	177	0	51	14	0	7,3
212	5	3020	75	2	80	177	0	51	29	0	8,2
212	6	3020	75	4	95	177	22	51	22	0	9,2
224	1	2012	50	7	20	189	0	32	12	112	2,7
224	2	2517	65	5	35	189	0	45	10	124	4,4
224	3	2517	65	6	50	189	2,5	45	2,5	124	5,5
224	4	3020	75	2	65	189	0	52,5	12,5	0	7,4
224	5	3020	75	2	80	189	0	52,5	27,5	0	8,3
224	6	3020	75	4	95	189	22	51	22	0	9,4
236	1	2012	50	7	20	201	0	32	12	112	2,8
236	2	2517	65	5	35	201	0	45	10	124	4,6
236	3	2517	65	6	50	201	2,5	45	2,5	124	5,7
236	4	3020	75	2	65	201	0	52,5	12,5	0	7,8
236	5	3020	75	2	80	201	0	52,5	27,5	0	8,7
236	6	3020	75	4	95	201	22	51	22	0	9,7
250	1	2012	50	7	20	215	0	32	12	112	2,9

Keilriemenscheibe SPA mit Taper


Pulley SPA with Taper

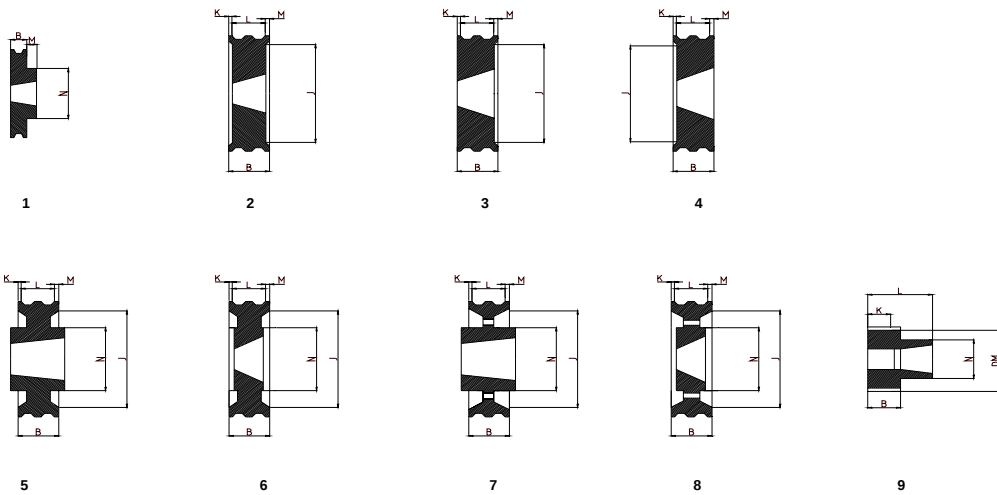

DM	Rillen Groove	Buchse Bush	M.Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
250	2	2517	65	7	35	215	0	45	10	124	4,8
250	3	2517	65	6	50	215	2,5	45	2,5	124	5,9
250	4	3020	75	6	65	215	7,0	51	7,0	159	8,0
250	5	3020	75	6	80	215	14,5	51	14,5	159	9,0
250	6	3020	75	6	95	215	22,0	51	22,0	159	10,0
265	1	2012	50	7	20	230	0	32	12,0	112	3,1
265	2	2517	65	7	35	230	0	45	10,0	124	5,1
265	3	2517	65	6	50	230	2,5	45	2,5	159	6,3
265	4	3020	75	6	65	230	7,0	51	7,0	159	8,4
265	5	3020	75	6	80	230	14,5	51	14,5	159	9,5
265	6	3020	75	6	95	230	22,0	51	22,0	159	10,5
280	1	2012	50	7	20	248	0	32	12,0	112	3,3
280	2	2517	65	7	35	248	0	45	10,0	124	5,4
280	3	2517	65	6	50	248	2,5	45	2,5	159	6,7
280	4	3020	75	6	65	248	7,0	51	7,0	159	8,8
280	5	3525	90	6	80	248	7,5	65	7,5	178	12,8
280	5	3535	90	5	80	248	4,5	89	4,5	178	15,5
280	6	3525	90	6	95	248	15,0	65	15,0	178	14,5
300	1	2012	50	7	20	265	0	32	12,0	112	3,5
300	2	2517	65	7	35	265	0	45	10,0	124	5,8
300	3	3020	75	5	50	265	0,5	51	0,5	159	7,4
300	4	3020	75	6	65	265	7,0	51	7,0	159	9,3
300	5	3525	90	6	80	265	7,5	65	7,5	178	13,5
300	5	3535	90	5	80	265	4,5	89	4,5	178	16,2
300	6	3525	90	6	95	265	15,0	65	15,0	178	15,5
315	1	2012	50	7	20	280	0	32	12,0	112	3,6
315	2	2517	65	7	35	280	0	45	10,0	124	6,0
315	3	3020	75	5	50	280	0,5	51	0,5	159	8,3
315	4	3020	75	6	65	280	7,0	51	7,0	159	9,7
315	5	3525	90	6	80	280	7,5	65	7,5	178	14,3
315	5	3535	90	5	80	280	4,5	89	4,5	178	17,0
315	6	3525	90	6	95	280	15,0	65	15,0	178	17,5
355	1	2012	50	7	20	320	0	32	12,0	112	4,2
355	2	2517	65	7	35	320	0	45	10,0	124	6,7
355	3	3020	75	7	50	320	0,5	51	0,5	159	9,2
355	4	3020	75	8	65	320	7,0	51	7,0	159	11,0
355	5	3525	90	8	80	320	7,5	65	7,5	178	15,9
355	5	3535	90	7	80	320	4,5	89	4,5	178	18,6
355	6	3525	90	8	95	320	15,0	65	15,0	178	19,0
400	1	2012	50	7	20	365	0	32	12,0	112	4,9

Keilriemenscheibe SPA mit Taper

Pulley SPA with Taper

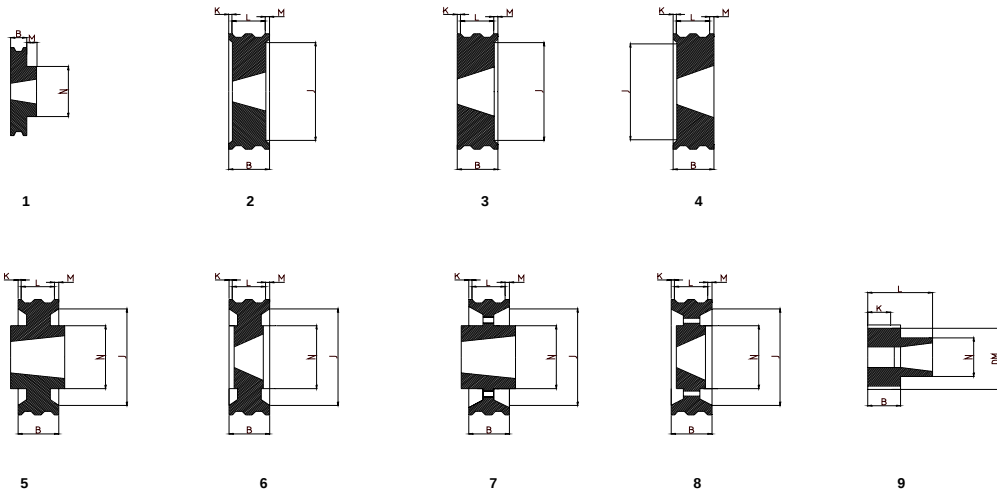


DM	Rillen Groove	Buchse Bush	M.Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
400	2	2517	65	7	35	365	0	45	10,0	124	8,1
400	3	3020	75	7	50	365	0,5	51	0,5	159	11,0
400	4	3020	75	8	65	365	7,0	51	7,0	159	12,8
400	5	3525	90	8	80	365	7,5	65	7,5	178	18,3
400	5	3535	90	7	80	365	4,5	89	4,5	178	21,0
400	6	3525	90	8	95	365	15,0	65	15,0	178	22,0
450	1	2012	50	7	20	418	0	32	12,0	112	7,0
450	2	2517	65	7	35	418	0	45	10	124	10,3
450	3	3020	75	7	50	418	0,5	51	0,5	159	14,1
450	4	3020	75	8	65	418	7,0	51	7,0	159	15,5
450	5	3525	90	8	80	418	7,5	65	7,5	178	21,6
450	5	3535	90	7	80	418	4,5	89	4,5	178	24,3
450	6	3525	90	8	95	418	15,0	65	15,0	178	25,2
500	1	2517	65	7	20	465	0	45	25,0	124	8,0
500	2	2517	65	7	35	465	0	45	10,0	124	11,6
500	3	3020	75	7	50	465	0,5	51	0,5	159	16,0
500	4	3020	75	8	65	465	7,0	51	7,0	159	18,2
500	5	3525	90	8	80	465	7,5	65	7,5	178	24,6
500	5	3535	90	7	80	465	4,5	89	4,5	178	27,3
500	6	3525	90	8	95	465	15,0	65	15,0	178	28,0
560	1	2517	65	7	20	525	0	45	25,0	124	11,6
560	2	3020	75	7	35	525	0	51	16,0	159	15,5
560	3	3020	75	7	50	525	0,5	51	0,5	159	17,8
560	4	3525	90	7	65	525	0	65	0	178	24,0
560	4	3535	90	7	65	525	12,0	89	12,0	178	26,7
560	5	3525	90	8	80	525	7,5	65	7,5	178	27,7
560	5	3535	90	7	80	525	4,5	89	4,5	178	30,4
560	6	3525	90	8	95	525	15,0	65	15,0	178	31,5
630	1	2517	65	7	20	595	0	45	25,0	124	10,1
630	2	3020	75	7	35	595	0	51	16,0	159	16,0
630	3	3020	75	7	50	595	0,5	51	0,5	159	22,0
630	4	3525	90	7	65	595	0	65	0	178	28,1
630	4	3535	90	7	65	595	12,0	89	12,	178	30,8
630	5	3525	90	8	80	595	7,5	65	7,5	178	31,0
630	5	3535	90	7	80	595	4,5	89	4,5	178	33,7
630	6	4030	100	8	95	595	9,5	76	9,5	216	42,0
800	2	3525	90	7	35	766	15,0	65	15,0	178	26,6
800	2	3535	90	7	35	766	27,0	89	27,0	178	29,3
800	3	3525	90	7	50	766	7,5	65	7,5	178	31,8
800	3	3535	90	7	50	766	19,5	89	19,5	178	34,5
800	4	3525	90	7	65	766	0	65	0	178	36,3
800	4	3535	90	7	65	766	12,0	89	12,0	178	39,0
800	5	4030	100	8	80	766	2,0	76	2,0	216	49,0
800	5	4040	100	7	80	766	11,0	102	11,0	216	54,0

DM	Rillen Groove	Buchse Bush	M.Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
800	6	4030	100	8	95	766	9,5	76	9,5	216	55,0
900	3	3525	90	7	50	866	7,5	65	7,5	178	36,6
900	3	3535	90	7	50	866	19,5	89	19,5	178	39,3
900	4	3525	90	7	65	866	0	65	0	178	42,8
900	4	3535	90	7	65	866	12,0	89	12,0	178	45,5
900	5	4030	100	8	80	866	2,0	76	2,0	216	53,7
900	5	4040	100	7	80	866	11,0	102	11,0	216	58,7
900	6	4030	100	8	95	866	9,5	76	9,5	216	60,5

Keilriemenscheibe SPB mit Taper


Pulley SPB with Taper

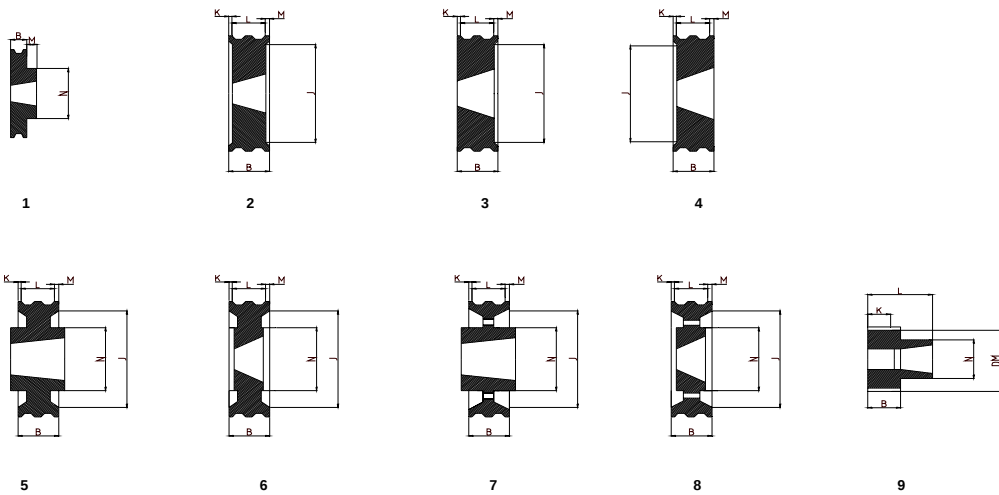

DM	Rillen Groove	Buchse Bush	M.Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
100	1	1610	42	1	20			25,0			0,90
	2	1610	42	3	44	62	19,0	25,0			1,20
	3	1610	42	3	63	62	38,0	25,0			1,70
112	1	1610	42	1	25		.	25,0		92	1,10
	2	1610	42	3	44	75	19,0	25,0			1,50
	3	1610	42	3	63	75	38,0	25,0			20,00
118	1	1610	42	1	25			25,0		92	1,30
	2	1610	42	3	44	81	19,0	25,0			1,70
	3	1610	42	3	63	81	38,0	25,0			23,00
125	1	1610	42	1	25		.	25,0		92	1,50
	2	2012	50	2	44	85	.	32,0	12,0		1,90
	3	2012	50	2	63	85	-	32,0	31,0		2,40
	4	2012	50	4	82	85	25,0	32,0	25,0		3,00
	5	2012	50	3	101	85	69,0	32,0			3,50
132	1	7610	42		25			25,0		92	1,80
	2	2012	50	2	44	92		32,0	12,0		2,20
	3	2012	50	2	63	92		32,0	31,0		2,80
	4	2012	50	4	82	92	25,0	32,0	25,00		3,40
	5	2012	50	4	101	92	34,5	32,0	34,5		3,70
140	1	1610	42	1	25			25,0		92	2,30
	2	2012	50	2	44	100		32,0	12,0		2,70
	3	2012	50	2	63	100		32,0	31,0		3,30
	4	2517	65	2	82	100		45,0	37,0		3,70
	5	2517	65	2	101	100		45,0	56,0		4,50
	6	2517	65	4	120	100	37,5	45,0	37,5		4,60
150	1	1610	42	1	25			25,0		92	2,70
	2	2012	50	2	44	110		32,0	12,0		3,10
	3	2517	65	2	63	110		45,0	18,0		3,90
	4	2517	65	2	82	110		45,0	37,0		4,40
	5	2517	65	4	101	110	28,0	45,0	28,0		5,20
	6	2510	65	4	120	100	37,5	45,0	37,5		56,00
160	1	1610	42	1	25			25,0		92	2,50
	2	2012	50	2	44	114		32,0	12,0		2,90
	3	2517	65	2	63	114		45,0	18,0		4,20
	4	2517	65	4	82	114	18,5	45,0	18,5		4,90
	5	2517	65	4	101	114	28,0	45,0	28,0		6,00
	6	3020	75	4	120	114	34,5	51,0	34,5		54,00
170	1	1610	42	1	25			25,0		92	2,90
	2	2012	50	2	44	124		32,0	12,0		3,30
	3	2517	65	2	63	124		45,0	18,0		4,90
	4	2517	65	4	82	124	18,5	45,0	18,5		5,70
	5	3020	75	4	101	124	25,0	51,0	25,0		6,10
	6	3020	75	4	120	124	34,5	51,0	34,5		6,50
	8	3020	75	4	158	124	53,5	51,0	53,5		8,00

Keilriemenscheibe SPB mit Taper


Pulley SPB with Taper

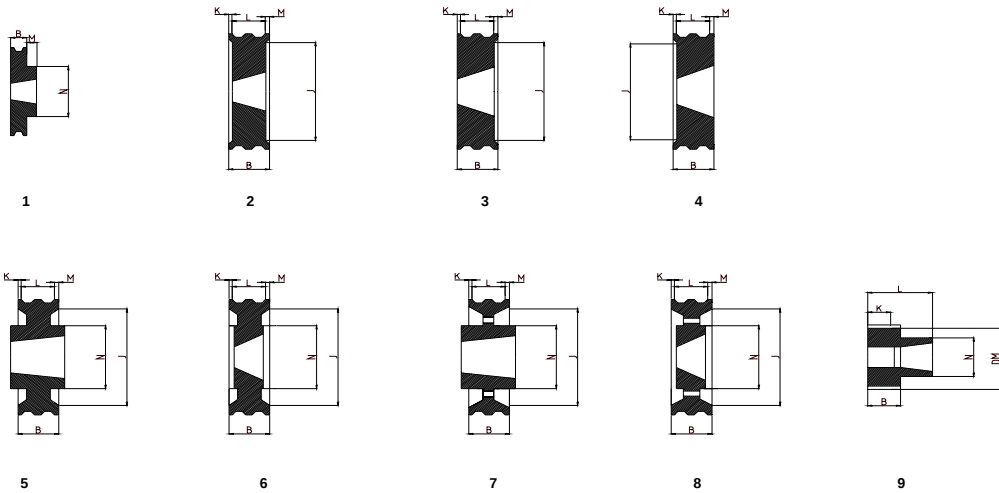

	Rillen	Buchse	M.Bohr.								Gewicht
DM	Groove	Bush	M. Bore	Typ	B	J	K	L	M	N	Weight
180	1	1610	42	1	25			25		92	4,1
	2	2517	65	1	44	134		45	1,0		4,5
	3	2517	65	2	63	134		45	18		5,5
	4	2517	65	4	82	134	18,5	45	18,5		6,9
	5	3020	75	4	101	134	25,0	51	25,0		7,1
	6	3020	75	4	120	134	34,5	51	34,5		7,7
	8	3020	75	4	158	139	53,5	51	53,5		9,5
190	1	2012	50	1	25			32	7,0	112	4,6
	2	2517	65	1	44			45	1,0	124	5,0
	3	2517	65	2	63	144		45	18,0		6,3
	4	2517	65	4	82	144	18,5	45	18,5		7,6
	5	3020	75	4	101	144	25,0	51	25,0		8,1
	6	3020	75	4	120	144	34,5	51	34,5		9,2
	8	3020	75	4	158	149	53,5	51	53,5		11,0
200	1	2012	50	1	25			32	7,0	95	5,0
	2	2517	65	1	44			45	1,0	124	5,4
	3	2517	65	2	63	154		45	18,0		6,5
	4	3020	75	2	82	154		51	31,0		8,8
	5	3020	75	2	101	154		51	50,0		9,1
	6	3020	75	4	120	154	34,5	51	34,5		10,0
	8	3525	90	4	158	159	46,5	65	46,5		12,0
	8	3535	90	4	158	159	345,0	89	345,0		135,0
212	1	2012	50	1	25			32	7,0	95	42,0
	2	2517	65	1	44			45	1,0	124	4,9
	3	2517	65	2	63	167		45	18,0		6,0
	4	3020	75	2	82	167		51	31,0		9,8
	5	3020	75	2	101	167		51	50,0		11,0
	6	3525	90	4	120	167	27,5	65	27,5		13,0
	6	3535	90	4	120	167	15,5	89	15,5		14,0
	8	3525	90	4	158	171	46,5	65	46,5		16,0
	8	3535	90	4	158	171	34,5	89	34,5		17,0
224	1	2012	50	1	25			32	7,0	95	4,7
	2	2517	65	1	44			45	1,0	124	5,3
	3	2517	65	2	63	178		45	18,0		6,3
	4	3020	75	2	82	178		51	31,0		11,0
	5	3020	75	2	101	178		51	50,0		13,0
	6	3525	90	4	120	178	27,5	65	27,5		15,0
	6	3535	90	4	120	178	15,5	89	15,5		17,0
	8	3525	90	4	158	184	46,5	65	46,5		18,0
	8	3535	90	4	158	184	34,5	89	34,5		19,0
	10	3525	90	4	196	184	65,5	65	65,5		21,0
	10	3535	90	4	196	184	46,0	89	61,0		22,0

Keilriemenscheibe SPB mit Taper


Pulley SPB with Taper

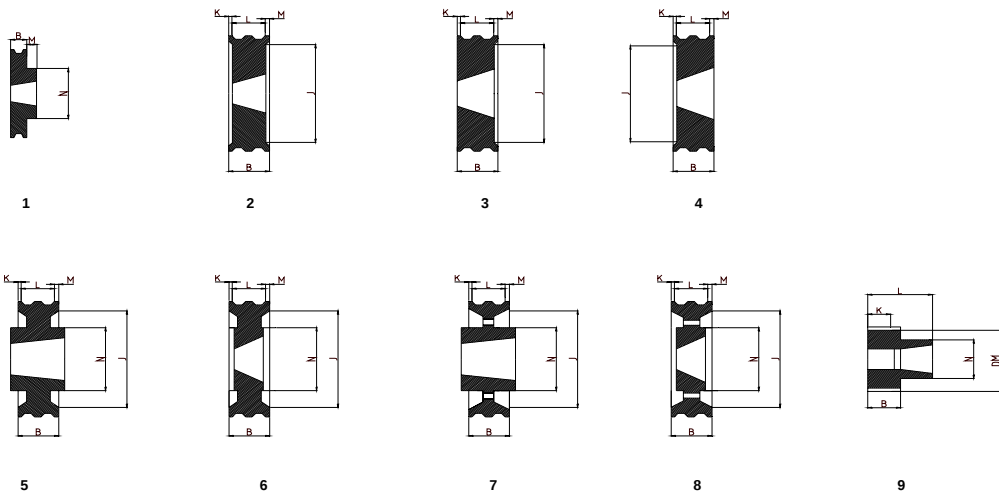

DM	Rillen Groove	Buchse Bush	M.Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
236	1	2012	50	1	25	198		32	7	95	5,0
	2	2517	65	1	44	198		45	1	124	5,5
	3	2517	65	8	63	198		45	18		7,0
	4	3020	75	8	82	198	15,5	51	16		15,0
	5	3525	90	4	101	198	18,0	65	18		15,0
	5	3535	90	3	101	198		89	12		17,0
	6	3525	90	4	120	198	27,5	65	28		19,0
	6	3535	90	4	120	198	15,5	89	16		20,0
	8	3525	90	4	158	198	46,5	65	47		22,0
	8	3535	90	4	158	198	34,5	89	35		22,0
	10	3525	90	4	196	198	65,5	65	66		23,0
	10	3535	90	4	196	198	53,5	89	535		253
250	1	2012	50	1	25	212		32	7	95	5,4
	2	2517	65	7	44			45	1	124	5,5
	3	3020	75	2	63	204		51	12		7,7
	4	3020	75	2	82	204		51	31		20,0
	5	3525	90	4	101	204	18,0	65	18		21,0
	5	3535	90	2	101	204		89	12		22,0
	6	3525	90	4	120	204	27,5	65	28		23,0
	6	3535	90	4	120	204	15,5	89	16		23,0
	8	3525	90	4	158	204	46,5	65	47		26,0
	8	3535	90	4	158	204	34,5	89	35		28,0
	10	3525	90	4	196	204	65,5	65	66		27,0
	10	3535	90	4	196	204	46,0	89	61		29,0
265	2	2517	65	7	44	224	0,5	45	0,5	124	6,2
	3	3020	75	6	63	224	6,0	51	6	159	8,0
	4	3020	75	6	82	224	15,5	51	16	159	9,5
	5	3525	90	6	101	224	18,0	65	18	178	17,0
	6	3525	90	6	120	224	27,5	65	28	178	17,0
	8	3525	90	6	158	224	46,5	65	465	178	240
280	1	2012	50	7	25	242		32	7	95	6,1
	2	2517	65	7	44	242	0,5	45	0,5	124	6,8
	3	3020	75	8	63	242	6,0	51	6	159	8,6
	4	3020	75	6	82	242	15,5	51	16	159	10,0
	5	3525	90	6	101	239	18,0	65	18	178	15,0
	5	3535	90	6	101	239	6,0	89	6	178	18,0
	6	3525	90	6	120	239	27,5	65	28	178	17,0
	6	3535	90	6	120	239	15,5	89	16	178	20,0
	8	3525	90	6	158	239	46,5	65	47	178	25,0
	8	3535	90	6	158	239	34,5	89	35		27,0
	10	3525	90	6	196	239	65,5	65	66		28,0
	10	3535	90	6	196	239	46,0	89	61		31,0


Keilriemenscheibe SPB mit Taper

Pulley SPB with Taper

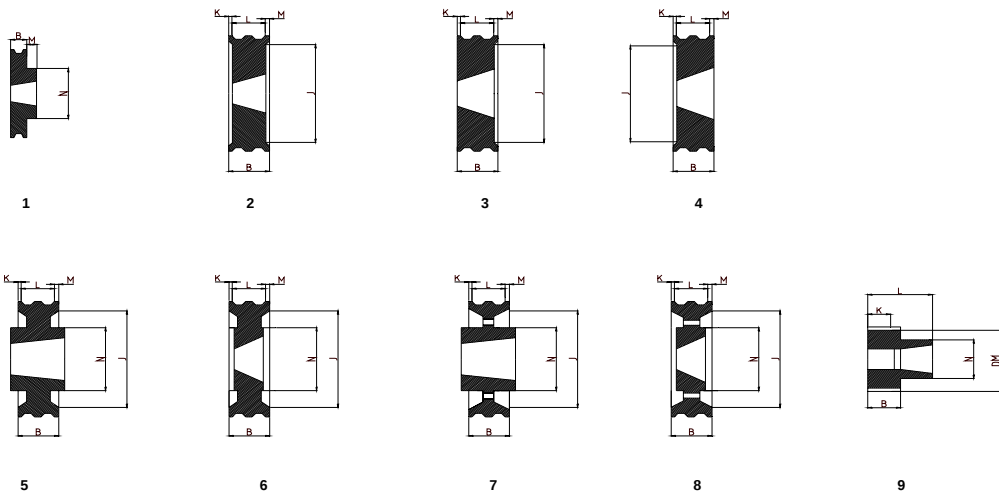

DM	Rillen Groove	Buchse Bush	M.Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
300	1	2012	50	7	25	262		32	7	95	6,8
	2	2517	65	7	44	262	0,5	45	0,5	124	7,3
	3	3020	75	8	63	262	6,0	51	6,0	159	9,2
	4	3020	75	6	82	262	15,5	51	15,5	159	14,3
	5	3525	90	6	101	259	18,0	65	18,0	178	15,5
	5	3535	90	6	101	259	6,0	89	6,0	178	18,2
	6	3525	90	6	120	259	27,5	65	27,5	178	19,2
	6	3535	90	6	120	259	15,5	89	15,5	178	21,9
	8	3525	90	6	158	259	46,5	65	46,5	178	235
	8	3535	90	6	158	259	34,5	89	34,5	178	26,2
315	1	2012	50	7	25	277		32	7,0	95	7,2
	2	2517	65	7	44	269	0,5	45	0,5	124	7,8
	3	3020	75	8	63	269	6,0	51	6,0	159	9,6
	4	3525	90	6	82	269	8,5	65	8,5	178	14,4
	4	3535	90	5	82	269	3,5	89	3,5	178	17,1
	5	3525	90	6	101	269	18,0	65	18,0	178	16,1
	5	3535	90	6	101	269	6,0	89	6,0	178	18,8
	6	3525	90	6	120	269	27,5	65	27,5	178	20,3
	6	3535	90	6	120	269	15,5	89	15,5	178	23,0
	8	3525	90	6	158	274	46,5	65	46,5	178	23,3
	8	3535	90	6	158	274	34,5	89	34,5	178	26,0
	10	3525	90	6	196	274	65,5	65	65,5	178	28,8
	10	3535	90	6	196	274	535,0	89	535,0	178	315,0
335	2	2517	65	7	44	297		45		120	7,8
	3	3020	75	8	63	297	6,0	51	6,0	145	10,5
	4	3525	90	6	82	297	8,5	65	8,5	178	15,6
	4	3535	90	7	82	297	3,5	89	3,5	178	18,3
	5	3525	90	8	101	297	18,0	65	18,0	178	16,8
	5	3535	90	8	101	297	6,0	89	6,0	178	19,5
	6	3525	90	8	120	297	27,5	65	27,5	178	19,3
	6	3535	90	8	120	297	15,5	89	15,5	178	22,0
	8	3525	90	8	158	294	46,5	65	46,5	178	25,5
	8	3535	90	8	158	294	34,5	89	34,5	178	28,2
	10	4030	100	8	196	294	60,0	76	60,0	216	32,0
	10	4040	100	8	196	294	47,0	102	47,0	216	360,0
355	2	3020	75	7	44	309	3,5	51	3,5	159	8,7
	3	3020	75	8	63	309	6,0	51	6,0	159	10,8
	4	3525	90	8	82	309	8,5	65	8,5	178	15,9
	4	3535	90	7	82	309	3,5	89	3,5	178	18,6
	5	3525	90	8	101	309	18,0	65	18,0	178	18,1
	5	3535	90	8	101	309	6,0	89	6,0	178	20,8
	6	3525	90	6	120	309	27,5	65	27,5	178	20,1
	6	3535	90	6	120	309	15,5	89	15,5	178	22,8
	8	3525	90	8	158	317	46,5	65	46,5	178	24,3


Keilriemenscheibe SPB mit Taper Pulley SPB with Taper

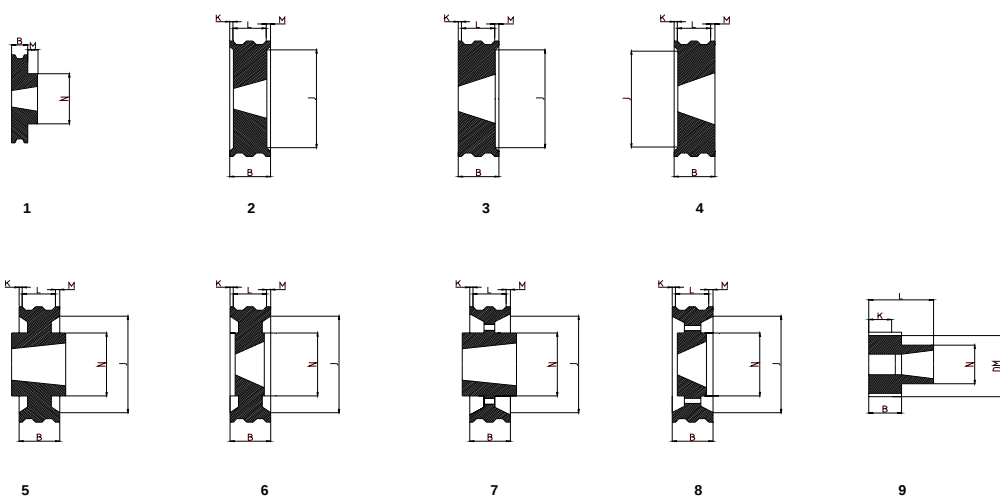

DM	Rillen Groove	Buchse Bush	M.Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
	8	3535	90	8	158	317	34,5	89	34,5	178	27,0
	10	4030	100	8	196	317	60,0	76	60,0	216	33,5
	10	4040	100	8	196	317	47,0	102	47,0	216	380
375	2	3020	75	7	44	335	3,5	51	3,5	159	9,5
	3	3020	75	8	63	335	6,0	51	6,0	159	11,5
	4	3525	90	8	82	335	8,5	65	8,5	178	16,5
	5	3525	90	8	101	335	18,0	65	18,0	178	21,0
	6	3525	90	8	120	335	27,5	65	27,5	178	25,0
	8	3525	90	8	158	335	46,5	65	46,5	178	28,0
400	2	3020	75	7	44	354	3,5	51	3,5	159	10,0
	3	3525	90	7	63	354	1,0	65	1,0	178	15,6
	3	3535	90	7	63	354	13,0	89	13,0	178	18,3
	4	3525	90	8	82	354	8,5	65	8,5	178	17,8
	4	3535	90	7	82	354	3,5	89	3,5	178	20,5
	5	3525	90	8	101	354	18,0	65	18,0	178	20,7
	5	3535	90	8	101	354	6,0	89	6,0	178	23,4
	6	3525	90	8	120	354	27,5	65	27,5	178	22,4
	6	3535	90	8	120	354	15,5	89	15,5	178	25,1
	8	4030	90	8	158	362	41,0	76	41,0	216	32,0
	8	4040	100	8	158	362	28,0	102	28,0	216	36,5
	10	4030	100	8	196	362	60,0	76	60,0	216	36,0
	10	4040	100	8	196	362	47,0	102	47,0	216	41,0
425	2	3020	75	7	44	381	3,5	51	3,5	159	11,5
	3	3525	90	7	63	381	1,0	65	1,0	178	18,0
	4	3525	90	8	82	381	8,5	65	8,5	178	19,5
	5	3525	90	8	100	381	18,0	65	18,0	178	23,0
	6	3525	90	8	120	381	27,5	65	27,5	178	25,1
	8	4030	100	8	158	381	34,5	89	34,5	216	35,1
450	2	3020	75	7	44	410	3,5	51	3,5	159	12,1
	3	3525	90	7	63	410		65	2,0	178	19,2
	3	3535	90	7	63	410	13,0	89	13,0	178	21,9
	4	3525	90	8	82	410		65	17,0	178	21,8
	4	3535	90	7	82	410	3,5	89	3,5	178	24,5
	5	3525	90	8	101	410		65	36,0	178	24,6
	5	3535	90	8	101	410	6,0	89	6,0	178	27,3
	6	4030	100	8	120	410	22,0	76	22,0	216	31,0
	6	4040	100	8	120	410	9,0	102	9,0	216	35,5
	8	4030	100	8	158	410	41,0	76	41,0	216	36,0
	8	4040	100	8	158	410	28,0	102	28,0	216	40,9
	10	4535	110	8	196	410	53,5	89	53,5	242	47,0
	10	4545	110	8	196	410	40,5	115	40,5	242	53,5
475	2	3020	75	7	44	431	3,5	51	3,5	159	13,0
	3	3525	90	7	63	431	1,0	65	1,0	178	20,0


Keilriemenscheibe SPB mit Taper

Pulley SPB with Taper

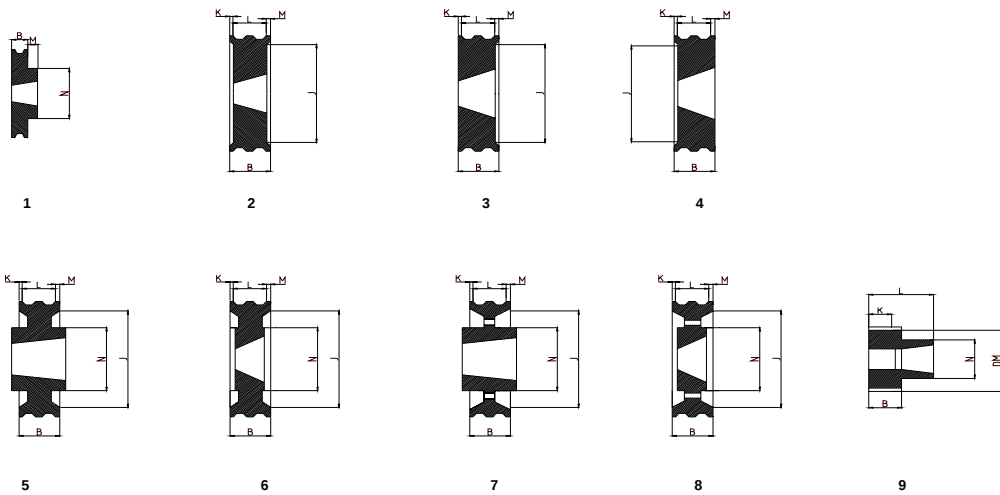

DM	Rillen Groove	Buchse Bush	M.Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
	4	3525	90	8	82	431	8,5	65	8,5	178	22,5
	5	3525	90	8	101	431	18,0	65	18,0	178	26,5
	6	4030	100	8	120	431	15,5	89	15,5	216	33,5
	8	4030	100	8	158	431	34,5	89	34,5	216	39,5
500	2	3020	75	7	44	454	3,5	51	3,5	159	13,2
	3	3525	90	7	63	454		65	2,0	178	20,4
	3	3535	90	7	63	454	13,0	89	13,0	178	23,1
	4	3525	90	8	82	454		65	17,0	178	23,9
	4	3535	90	7	82	454	3,5	89	3,5	178	26,6
	5	3525	90	8	101	454		65	36,0	178	27,0
	5	3535	90	8	101	454	6,0	89	6,0	178	29,9
	6	4030	100	8	120	454	22,0	76	22,0	216	34,0
	6	4040	100	8	120	454	9,0	102	9,0	216	38,9
	8	4030	100	8	158	460	41,0	76	41,0	216	40,5
	8	4040	100	8	158	460	28,0	102	28,0	216	45,5
	10	4535	110	8	196	460	53,5	89	53,5	242	55,0
	10	4545	110	8	196	460	40,5	115	40,5	242	61,0
530	2	3020	75	7	44	484	3,5	51	3,5	159	14,2
	3	3525	90	7	63	484	1,0	65	1,0	178	22,0
	4	3525	90	8	82	484	8,5	65	8,5	178	24,5
	5	3525	90	8	101	484	18,0	65	18,0	178	28,0
	6	4030	100	8	120	484	15,5	89	15,5	216	35,5
	8	4030	100	8	158	484	34,5	89	34,5	216	42,0
560	2	3020	75	7	44	525	3,5	51	3,5	159	16,5
	3	3525	90	7	63	525		65	2,0	178	23,2
	3	3535	90	7	63	525		89	26,0	178	25,9
	4	3525	90,00	8	82	525		65	17,0	178	26,3
	4	3535	90,00	7	82	525		89	7,0	178	29,0
	5	4030	100,00	8	101	525	12,5	76	12,5	216	32,5
	5	4040	100,00	7	101	525	0,5	102	0,5	216	35,3
	6	4030	100,00	8	120	525	22,0	76	22,0	216	38,0
	6	4040	100,00	8	120	525	9,0	102	9,0	216	43,1
	8	4535	110,00	8	158	525	34,5	89	34,5	242	44,5
	8	4545	110,00	8	158	525	21,5	115	21,5	242	49,0
630	2	3020	75,00	7	44	584	3,5	51	3,5	146	18,5
	3	3525	90,00	7	63	584		65	2,0	178	26,2
	3	3535	90,00	7	63	584	13,0	89	13,0	178	28,9
	4	3525	90,00	8	82	584		65	17,0	178	30,6
	4	3535	90,00	7	82	584	3,5	89	3,5	178	33,3
	5	4030	100,00	8	101	584	12,5	76	12,5	216	38,5
	5	4040	100,00	7	101	584	0,5	102	0,5	216	43,1


Keilriemenscheibe SPB mit Taper Pulley SPB with Taper

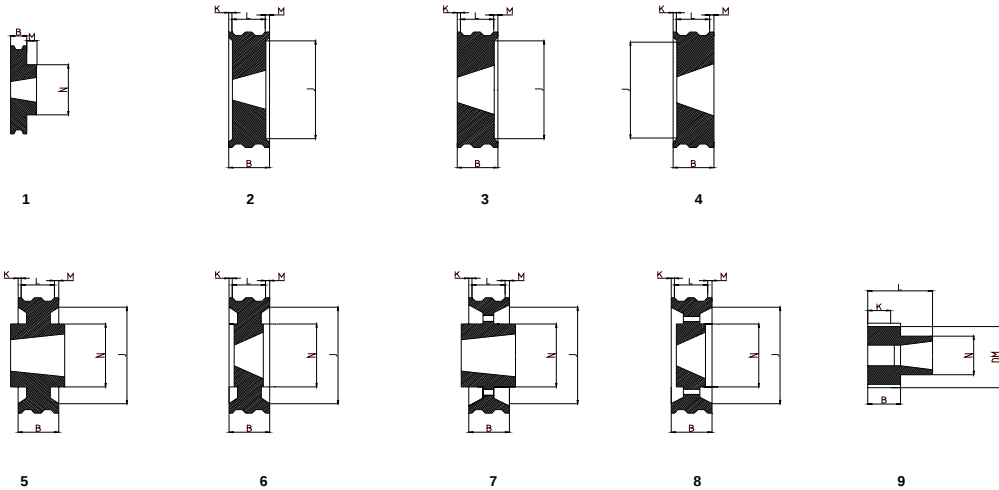

DM	Rillen Groove	Buchse Bush	M.Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
	8	4535	110	8	158	590	34,5	89	34,5	242	57,0
	8	4545	110	8	158	590	21,5	115	21,5	242	62,0
	10	4535	110	8	196	590	53,5	89	53,5	242	66,0
	10	4545	110	8	196	590	40,5	115	40,5	242	72,0
710	2	3030	75	7	44	670	16,0	76	16,0	145	23,0
	3	3525	90	7	63	670	1,0	65	1,0	180	30,5
	3	3535	90	7	63	670	13,0	89	13,0	180	33,2
	4	3525	90	8	82	670	8,5	65	8,5	180	36,4
	4	3535	90	7	82	670	3,5	89	3,5	180	39,1
	5	4030	100	8	101	670	12,5	76	12,5	215	46,0
	5	4040	100	7	101	670	0,5	102	0,5	215	50,2
	6	4535	110	8	120	670	15,5	89	15,5	242	57,0
	6	4545	110	8	120	670	2,5	115	2,5	242	62,3
	8	4535	110	8	158	670	34,5	89	34,5	242	65,5
	8	4545	110	8	158	670	21,5	115	21,5	242	71,0
	10	4535	110	8	196	670	53,5	89	53,5	242	75,0
	10	4545	110	8	196	670	40,5	115	40,5	242	80,0
800	2	3525	90	7	44	760	10,5	65	10,5	180	27,1
	2	3535	90	7	44	760	22,5	89	22,5	180	29,8
	3	3525	90	7	63	760		65	2	180	34,0
	3	3535	90	7	63	760	13,0	89	13	180	36,7
	4	4030	100	8	82	760		76	6	216	43,8
	4	4040	100	7	82	760	10,0	102	10	216	48,8
	5	4030	100	8	101	760	19,0	76	6	216	51,1
	5	4040	100	7	101	760	0,5	102	0,5	216	56,1
	6	4535	110	8	120	760	15,5	89	15,5	242	64,9
	6	4545	110	8	120	760	2,5	115	2,5	242	71,4
	8	4535	110	8	158	760	34,5	89	34,5	242	84,4
	8	4545	110	8	158	760	21,5	115	21,5	242	90,9
	10	4535	110	8	196	760	53,5	89	53,5	242	96,0
	10	4545	110	8	196	760	40,5	115	40,5	242	102,0
900	3	3525	90	7	63	858	1,0	65	1,0	180	44,1
	3	3535	90	7	63	858	13,0	89	13,0	180	46,8
	4	4030	100	8	82	858	3,0	76	3,0	216	55,0
	4	4040	100	7	82	858	10,0	102	10,0	216	60,0
	5	4535	100	8	101	858	6,0	89	6,0	242	67,5
	5	4545	110	7	101	858	7,0	115	7,0	242	74,8
	6	4535	110	8	120	858	15,5	89	15,5	242	74,5
	6	4545	110	8	120	858	2,5	115	2,5	242	81,5
	8	4535	110	8	158	858	34,5	89	34,5	242	103,5
	8	4545	110	8	158	858	21,5	115	21,5	242	110,0
	10	5040	125	8	196	858	47,0	102	47,0	257	119,0

Keilriemenscheibe SPB mit Taper


Pulley SPB with Taper

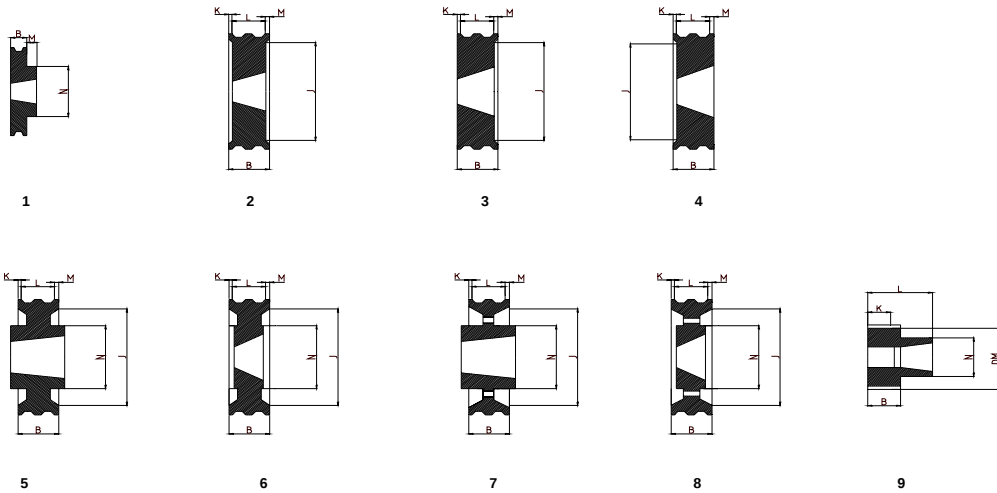

	Rillen	Buchse	M.Bohr.								Gewicht
DM	Groove	Bush	M. Bore	Typ	B	J	K	L	M	N	Weight
	10	5050	125	8	196	858	345	127	345	267	126,0
1000	3	4030	100	7	63	958	6,5	76	6,5	216	52,0
	3	4040	100	7	63	958	19,5	102	19,5	216	56,5
	4	4030	100	8	82	958	3,0	76	3,0	216	61,5
	4	4040	100	7	82	958	10,0	102	10,0	216	66,5
	5	4535	110	8	101	958	6,0	89	6,0	242	74,0
	5	4545	110	7	101	958	7,0	115	7,0	242	80,5
	6	4535	110	8	120	958	15,5	89	15,5	242	84,0
	6	4545	110	8	120	958	2,5	115	2,5	242	90,0
	8	4535	110	8	158	958	34,5	89	34,5	242	111,5
	8	5050	125	8	158	958	15,5	127	15,5	267	132,0
	10	5040	125	8	196	958	47,0	102	47,0	267	141,0
	10	5050	125	8	196	958	345	127	345	267	147,0
1250	3	4040	100	7	63	1208	19,5	102	19,5	216	120,0
	4	4545	110	7	82	1208	16,5	115	16,5	242	152,0
	5	4545	110	7	101	1208	7,0	115	7,0	242	175,0
	6	5050	125	7	120	1208	3,5	127	3,5	267	190,0
	8	5050	125	8	158	1208	15,5	127	15,5	267	232,0

Keilriemenscheibe SPC mit Taper


Pulley SPC with Taper

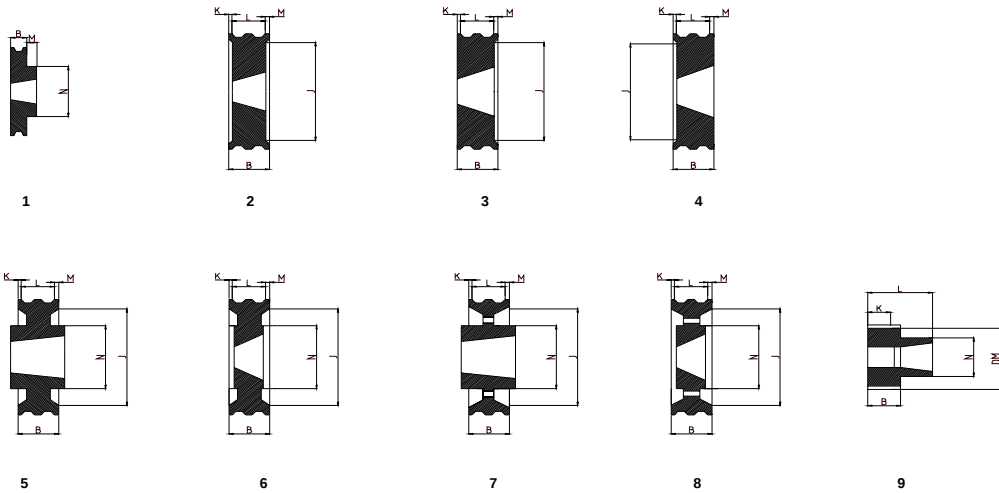

DM	Rillen Groove	Buchse Bush	M.Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
200	3	2517	65	4	85,0	151	20,0	45	20,0		9,0
	4	3020	75	4	110,5	151	29,8	51	29,8		10,5
	5	3525	90	4	136,0	151	35,5	65	35,5		11,3
	5	3535	90	4	136,0	151	16,0	89	31,0		14,0
	6	3525	90	4	161,5	151	48,3	65	48,3		14,3
	6	3535	90	4	161,5	151	15,8	89	56,8		17,0
	8	3525	90	4	212,5	151	73,8	65	73,8		20,3
	8	3535	90	4	212,5	151	45,8	89	77,8		23,0
212	3	3020	75	4	85,0	163	17,0	51	17,0		10,0
	4	3020	75	4	110,5	163	29,8	51	29,8		12,5
	5	3525	90	4	136,0	163	35,5	65	35,5		12,4
	5	3535	90	4	136,0	163	16,0	89	31,0		15,0
	6	3525	90	4	161,5	163	48,3	65	48,3		15,5
	6	3535	90	4	161,5	163	36,3	89	36,3		18,0
	8	3525	90	4	212,5	163	73,8	65	73,8		21,3
	8	3535	90	4	212,5	163	45,8	89	77,8		24,0
224	2	3020	75	4	59,5	170	4,3	51	4,3		8,1
	3	3020	75	4	85,0	170	17,0	51	17,0		11,0
	4	3525	90	4	110,5	170	22,8	65	22,8		11,3
	4	3535	90	4	110,5	170	10,8	89	10,8		14,0
	5	3525	90	4	136,0	170	35,5	65	35,5		13,5
	5	3535	90	4	136,0	170	23,5	89	23,5		16,2
	6	3525	90	4	161,5	170	48,3	65	48,3		16,3
	6	3535	90	4	161,5	170	36,3	89	36,3		19,0
	8	3525	90	4	212,5	170	73,8	65	73,8		22,2
	8	3535	90	4	212,5	170	45,8	89	77,8		24,9
236	3	3020	75	4	85,0	182	17,0	51	17,0		12,0
	4	3525	90	4	110,5	182	21,8	65	22,8		14,5
	4	3535	90	4	110,5	182	10,8	89	10,8		17,2
	5	3525	90	4	136,0	182	35,5	65	35,5		16,4
	5	3535	90	4	136,0	182	23,5	89	23,5		19,1
	6	3525	90	4	161,5	182	48,3	65	48,3		18,1
	6	3535	90	4	161,5	182	36,3	89	36,3		20,8
	8	3525	90	4	212,5	182	73,8	65	73,8		22,8
	8	3535	90	4	212,5	182	45,8	89	77,8		25,5
250	2	3020	75	4	59,5	170	4,1	51	4,5		9,8
	3	3020	75	4	85,0	200	17,0	51	17,0		14,5
	4	3525	90	4	110,5	200	22,8	65	22,8		18,0
	4	3535	90	4	110,5	200	10,8	89	10,8		20,7
	5	3525	90	4	136,0	200	35,5	65	35,5		20,1
	5	3535	90	4	136,0	200	23,5	89	23,5		22,8
	6	3525	90	4	161,5	200	48,3	65	48,3		23,3
	6	3535	90	4	161,5	200	36,3	89	36,3		26,0
	8	3525	90	4	212,5	200	73,8	65	73,8		26,9
	8	3535	90	4	212,5	200	61,8	89	61,8		29,7

Keilriemenscheibe SPC mit Taper


Pulley SPC with Taper

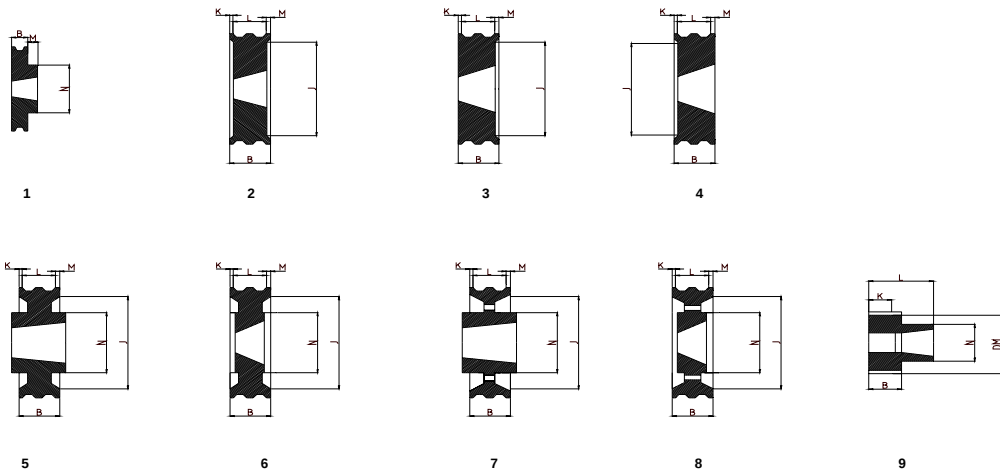

	Rillen	Buchse	M.Bohr.									Gewicht
DM	Groove	Bush	M. Bore	Typ	B	J	K	L	M	N		Weight
265	3	3525	90	4	85,0	215	10,0	65	10,0	178		18,5
	3	3535	90	1	85,0	215		89	4,0	178		21,2
	4	3525	90	6	110,5	215	22,8	65	22,8	178		21,3
	4	3535	90	6	110,5	215	10,8	89	10,8	178		24,0
	5	3525	90	6	136,0	215	35,5	65	35,5	178		23,5
	5	3535	90	6	136,0	215	23,5	89	23,5	178		26,2
	6	3525	90	6	161,5	215	48,3	65	48,3	178		26,3
	6	3535	90	6	161,5	215	36,3	89	36,3	178		29,0
	8	3525	90	6	212,5	215	73,8	65	73,8	178		30,6
	8	3535	90	6	212,5	215	61,8	89	61,8	178		33,3
280	3	3525	90	6	85,0	230	10,0	65	10,0	178		21,3
	3	3535	90	1	85,0	230		89	4,0	178		24,0
	4	3525	90	6	110,5	230	22,8	65	22,8	178		26,3
	4	3535	90	6	110,5	230	10,8	89	10,8	178		29,0
	5	3525	90	6	136,0	230	35,5	65	35,5	178		28,3
	5	3535	90	6	136,0	230	23,5	89	23,5	178		31,0
	6	3525	90	6	161,5	230	48,3	65	48,3	178		59,4
	6	3535	90	6	161,5	230	36,3	89	36,3	178		33,8
	8	3525	90	4	212,5	230	73,8	65	73,8			34,8
	8	3535	90	6	212,5	230	61,8	89	61,8	178		37,5
300	3	3525	90	6	85,0	250	10,0	65	10,0	178		18,3
	3	3535	90	5	85,0	250	2,0	89	2,0	178		21,0
	4	3525	90	6	110,5	250	22,8	65	22,8	178		22,3
	4	3535	90	6	110,5	250	10,8	89	10,8	178		25,0
	5	3525	90	6	136,0	250	35,5	65	35,5	178		25,8
	5	3535	90	6	136,0	250	23,5	89	23,5	178		28,5
	6	3525	90	6	161,5	250	48,3	65	48,3	178		52,1
	6	3535	90	6	161,5	250	36,3	89	36,3	178		29,0
	8	4030	100	4	212,5	250	68,3	76	68,3			41,5
	8	4040	100	4	212,5	250	55,3	102	55,3			46,5
315	3	3525	90	6	85,0	265	10,0	65	10,0	178		18,9
	3	3535	90	5	85,0	265	2,0	89	2,0	178		21,6
	4	3525	90	6	110,5	265	22,8	65	22,8	178		21,9
	4	3535	90	6	110,5	265	10,8	89	10,8	178		24,6
	5	3525	90	6	136	265	35,5	65	35,5	178		26,3
	5	3535	90	6	136	265	23,5	89	23,5	178		29,0
	6	3525	90	6	161,5	265	48,3	65	48,3	178		28,7
	6	3535	90	6	161,5	265	36,3	89	36,3	178		31,4
	8	4030	100	6	212,5	265	68,3	76	68,3	200		45,5
	8	4040	100	4	212,5	265	55,3	102	55,3	200		50,0
335	3	3525	90	6	85,0	282	10,0	65	10,0	178		19,8
	3	3535	90	5	85,0	282	2,0	89	2,0	178		22,5
	4	3525	90	6	110,5	282	22,8	65	22,8	178		23,8
	4	3535	90	6	110,5	282	10,8	89	10,8	178		26,5
	5	3525	90	6	136,0	282	35,5	65	35,5	178		27,2
	5	3535	90	6	136,0	282	23,5	89	23,5	178		30,0
	6	3525	90	6	161,5	282	48,3	65	48,3	178		32,3
	6	3535	90	6	161,5	282	36,3	89	36,3	178		35,0
	8	4030	100	6	212,5	282	68,3	76	68,3	200		53,0
	8	4040	100	6	212,5	282	55,3	102	55,3	200		58,0

Keilriemenscheibe SPC mit Taper


Pulley SPC with Taper

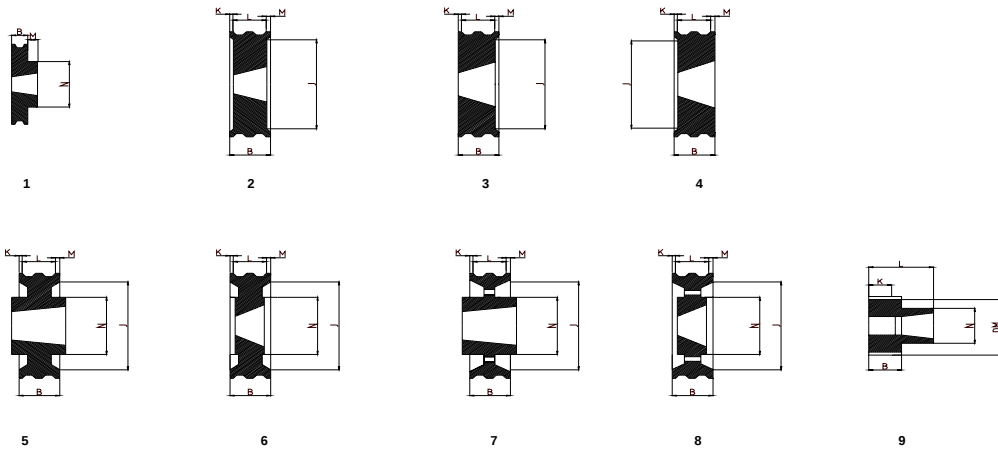

DM	Rillen Groove	Buchse Bush	M. Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
355	3	3525	90	6	85,0	305	10,0	65	10,0	178	20,2
	3	3535	90	5	85,0	305	2,0	89	2,0	178	22,9
	4	3525	90	6	110,5	305	22,8	65	22,8	178	45,8
	4	3535	90	6	110,5	305	10,8	89	10,8	178	28,3
	5	3525	90	6	136,0	305	35,5	65	35,5	178	29,8
	5	3535	90	6	136,0	305	23,5	89	23,5	178	32,5
	6	3525	90	6	161,5	305	48,3	65	48,3	178	33,3
	6	3535	90	6	161,5	305	36,3	89	36,3	178	36,0
	8	4030	100	6	212,5	305	68,3	76	68,3	200	62,5
	8	4040	100	6	212,5	305	55,3	102	55,3	200	67,5
375	3	3525	90	6	85,0	322	10,0	65	10,0	178	21,1
	3	3535	90	5	85,0	322	2,0	89	2,0	178	23,8
	4	3525	90	6	110,5	322	22,8	65	22,8	178	27,3
	4	3535	90	6	110,5	322	10,8	89	10,8	178	30,0
	5	3525	90	6	136,0	322	35,5	65	35,5	178	30,3
	5	3535	90	6	136,0	322	23,5	89	23,5	178	33,0
	6	4030	100	6	161,5	322	42,8	76	42,8	216	40,5
	6	4040	100	6	161,5	322	29,8	102	29,8	216	45,5
	8	4535	110	6	212,5	322	61,8	89	61,8	225	62,0
	8	4545	110	6	212,5	322	48,8	115	48,8	225	68,0
400	3	3525	90	6	85,0	350	10,0	65	10,0	178	21,4
	3	3535	90	7	85,0	350	2,0	89	2,0	178	24,1
	4	3525	90	8	110,5	350	22,8	65	22,8	178	25,3
	4	3535	90	8	110,5	350	10,8	89	10,8	178	28,0
	5	3525	90	8	136,0	350	35,5	65	35,5	178	31,3
	5	3535	90	8	136,0	350	23,5	89	23,5	178	34,0
	6	4030	100	6	161,5	350	42,8	76	42,8	216	43,0
	6	4040	100	6	161,5	350	29,8	102	29,8	216	48,0
	8	4535	110	6	212,5	350	61,8	89	61,8	240	59,5
	8	4545	110	6	212,5	350	48,8	115	48,8	240	65,0
425	3	3525	90	8	85,0	372	10,0	65	10,0	178	23,3
	3	3535	90	7	85,0	372	2,0	89	2,0	178	26,0
	4	3525	90	8	110,5	372	22,8	65	22,8	178	28,3
	4	3535	90	8	110,5	372	10,8	89	10,8	178	31,0
	5	4030	100	6	136,0	372	30,0	76	30,0	216	40,1
	5	4040	100	6	136,0	372	17,0	102	17,0	216	45,0
	6	4535	110	6	161,5	372	36,3	89	36,3	242	52,5
	6	4545	110	6	161,5	372	23,3	115	23,3	242	58,0
	8	4535	110	6	212,5	372	61,8	89	61,8	242	68,0
	8	4545	110	6	212,5	372	42,8	115	42,8	242	74,0
450	3	3525	90	8	85,0	400	10,0	65	10,0	178	25,9
	3	3535	90	7	85,0	400	2,0	89	2,0	178	28,6
	4	3525	90	8	110,5	400	22,8	65	22,8	178	30,8
	4	3535	90	8	110,5	400	10,8	89	10,8	178	33,5
	5	4030	100	8	136,0	400	30,0	76	30,0	216	39,5
	5	4040	100	8	136,0	400	17,0	102	17,0	216	45,0
	6	4535	110	6	161,5	400	36,3	89	36,3	242	55,0
	6	4545	110	6	161,5	400	23,3	115	23,3	242	61,1
	8	5040	125	6	212,5	400	55,3	102	55,3	265	72,0
	8	5050	125	6	212,5	400	42,8	127	42,8	265	78,7

Keilriemenscheibe SPC mit Taper


Pulley SPC with Taper

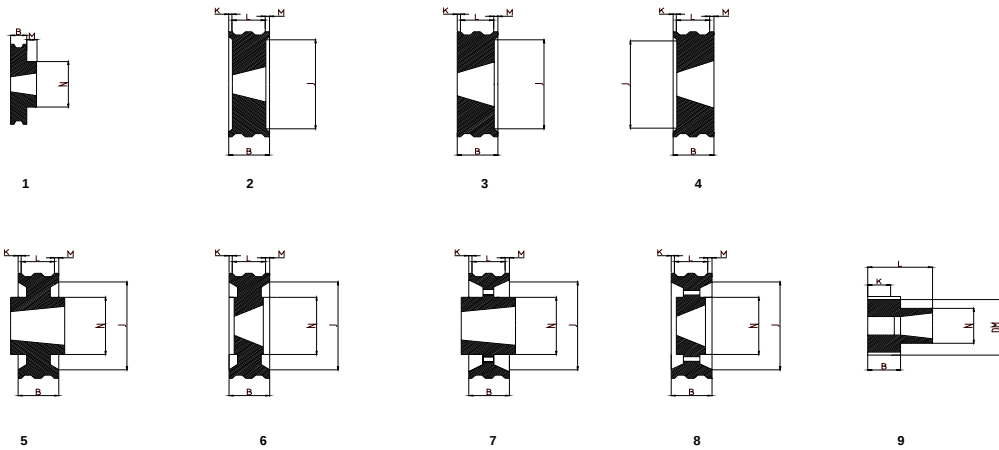

DM	Rillen Groove	Buchse Bush	M.Bohr. M. Bore	Typ	B	J	K	L	M	N	Gewicht Weight
475	3	3525	90	8	85,0	422	10,0	65	10,0	178	37,2
	3	3535	90	7	85,0	422	2,0	89	2,0	178	40,0
	4	3525	90	8	110,5	422	22,8	65	22,8	(78)	44,3
	4	3535	90	8	110,5	422	10,8	89	10,8	178	47,0
	5	4030	100	8	136,0	422	30,0	76	30,0	216	43,0
	5	4040	100	8	136,0	422	17,0	102	17,0	216	47,2
	6	4535	110	6	161,5	422	36,3	89	36,3	242	56,0
	6	4545	HO	6	161,5	422	23,3	115	23,3	242	62,8
	8	5040	125	6	212,5	422	55,3	102	55,3	265	76,0
	8	5050	125	6	212,5	422	42,8	127	42,8	265	81,5
500	3	3525	90		85,0	450	10,0	65	10,0	178	28,2
	3	3535	90	7	85,0	450	2,0	89	2,0	178	30,9
	4	3525	90	8	110,5	450	22,8	65	22,8	178	36,3
	4	3535	90	8	110,5	450	10,8	89	10,8	178	39,0
	5	4030	100	8	136,0	450	30,0	76	30,0	216	44,0
	5	4040	100	8	136,0	450	17,0	102	17,0	216	48,7
	6	4535	110	8	161,5	450	36,3	89	36,3	242	54,0
	6	4545	110	8	161,5	450	23,3	115	23,3	242	60,2
	8	5040	125	6	212,5	450	55,3	102	55,3	265	82,0
	8	5050	125	6	212,5	450	42,8	127	42,8	265	87,4
530	3	3525	90	8	85,0	480	10,0	65	10,0	178	32,3
	3	3535	90	7	85,0	480	2,0	89	2,0	178	35,0
	4	4030	100	8	110,5	480	17,3	76	17,3	216	35,0
	4	4040	100	8	110,5	480	4,3	102	4,3	216	40,0
	5	4535	HO	8	136,0	480	23,5	89	23,5	242	55,0
	5	4545	110	8	136,0	480	11,0	115	11,0	242	60,0
	6	5040	125	8	161,5	480	29,8	102	29,8	265	67,0
	6	5050	125	8	161,5	480	17,3	127	17,3	265	73,0
	8	5040	125	6	212,5	480	55,3	102	55,3	265	87,0
	8	5050	125	6	212,5	480	42,8	127	42,8	265	94,0
560	3	3525	90	8	85,0	510	10,0	65	10,0	178	33,3
	3	3535	90	7	85,0	510	2,0	89	2,0	178	36,0
	4	4030	100	8	110,5	510	17,3	76	17,3	216	45,5
	4	4040	100	8	110,5	510	4,3	102	4,3	216	50,0
	5	4535	HO	8	136,0	510	23,5	89	23,5	242	57,0
	5	4545	110	8	136,0	510	11,0	115	11,0	242	63,0
	6	5040	125	8	161,5	510	29,8	102	29,8	242	71,0
	6	5050	125	8	161,5	510	17,3	127	17,3	265	77,0
	8	5040	125	8	212,5	510	55,3	102	55,3	265	87,0
	8	5050	125	8	212,5	510	42,8	127	42,8	265	94,0
630	3	4030	100	8	85,0	580	4,5	76	4,5	216	44,0
	3	4040	100	7	85,0	580	8,5	102	8,5	216	48,5
	4	4535	110	8	110,5	580	10,8	89	10,8	242	55,0
	4	4545	110	7	110,5	580	2,2	115	2,2	242	61,0
	5	5040	125	8	136,0	580	17,0	102	17,0	267	70,5
	5	5050	125	8	136,0	580	4,5	127	4,5	267	77,0
	6	5040	125	8	161,5	580	29,8	102	29,8	267	79,5
	6	5050	125	8	161,5	580	17,3	127	17,3	267	86,0
	8	5040	125	8	212,5	580	55,3	102	55,3	265	98,5
	8	5050	125	8	212,5	580	42,8	127	42,8	265	105,5

Keilriemenscheibe SPC mit Taper


Pulley SPC with Taper

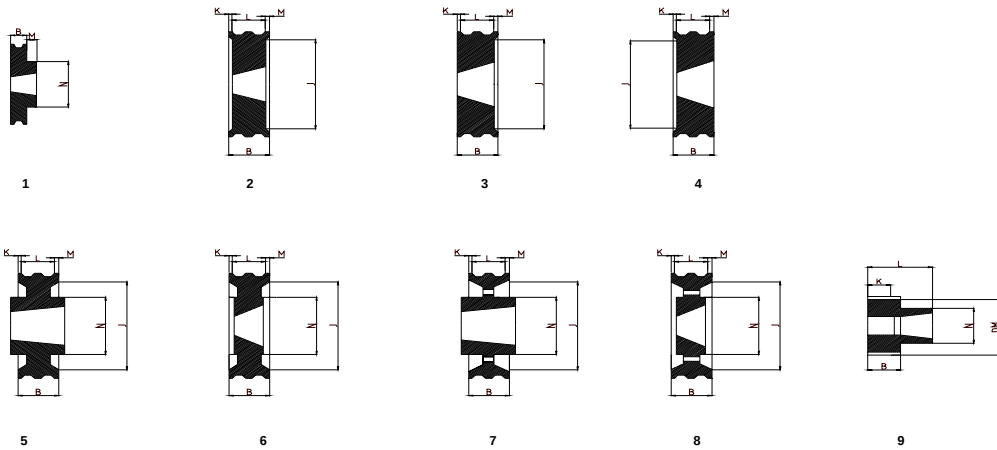

	Rillen	Buchse	M.Bohr.									Gewicht
DM	Groove	Bush	M. Bore	Typ	B	J	K	L	M	N		Weight
710	3	4030	100	8	85,0	667	10,0	65	10,0	216		
	3	4040	100	7	85,0	667	8,5	102	8,5	216		
	4	4535	110	8	110,5	667	10,8	89	10,8	242		
	4	4545	110	7	110,5	667	2,2	115	2,2	242		
	5	5040	125	8	136,0	667	17,0	102	17,0	267		
	5	5050	125	8	136,0	667	4,5	127	4,5	267		
	6	5040	125	8	161,5	667	29,8	102	29,8	267		
	6	5050	125	8	161,5	667	17,3	127	17,3	267		
	8	5040	125	8	212,5	667	55,3	102	55,3	267		
	8	5050	125	8	212,5	667	42,8	127	42,8	267		
800	3	4535	110	7	85,0	737	2,0	89	2,0	242		
	3	4545	110	7	85,0	737	15,0	115	15,0	242		
	4	5040	125	8	110,5	737	4,3	102	4,3	267		
	4	5050	125	7	110,5	737	8,2	127	8,2	267		
	5	5040	125	8	136,0	737	17,0	102	17,0	267		
	5	5050	125	8	136,0	737	4,5	127	4,5	267		
	6	5040	125	8	161,5	737	29,8	102	29,8	267		
	6	5050	125	8	161,5	737	17,3	127	17,3	267		
	8	5040	125	8	212,5	737	55,3	102	55,3	267		
	8	5050	125	8	212,5	737	42,8	127	42,8	267		
900	3	4535	110	7	85,0	847	2,0	89		242		
	3	4545	110	7	85,0	847	15,0	115	15,0	242		
	4	5040	125	8	110,5	847	4,3	102	4,3	267		
	4	5050	125	7	110,5	847	8,2	127	8,2	267		
	5	5040	125	8	136,0	847	17,0	102	17,0	267		
	5	5050	125	8	136,0	847	4,5	127	4,5	267		
	6	5040	125	8	161,5	847	29,8	102	29,8	267		
	6	5050	125	8	161,5	847	17,3	127	17,3	267		
	8	5040	125	8	212,5	847	55,3	102	55,3	267		
	8	5050	125	8	212,5	847	42,8	127	42,8	267		
1000	3	5040	125	7	85,0	937	8,5	102	8,5	267		
	3	5050	125	7	85,0	937	21,0	127	21,0	267		
	4	5040	125	8	110,5	937	4,3	102	4,3	267		
	4	5050	125	7	110,5	937	8,2	127	8,2	267		
	5	5040	125	8	136,0	937	17,0	102	17,0	267		
	5	5050	125	8	136,0	937	4,5	127	4,5	267		
	6	5040	125	8	161,5	937	29,8	102	29,8	267		
	6	5050	125	8	161,5	937	17,3	127	17,3	267		
	8	5040	125	8	212,5	937	55,3	102	55,3	267		
	8	5050	125	8	212,5	937	42,8	127	42,8	267		
1250	3	5050	125	7	85,0	1187	21,0	127	21,0	267		
	4	5050	125	7	110,5	1187	8,2	127	8,2	267		
	5	5050	125	8	136,0	1187	4,5	127	4,5	267		
	6	5050	125	8	161,5	1187	17,3	127	17,3	267		
	8	5050	125	8	212,5	1187	42,8	127	42,8	267		

Keilriemenscheibe S (SPZ) ungebohrt

Pulley S (SPZ) unboored

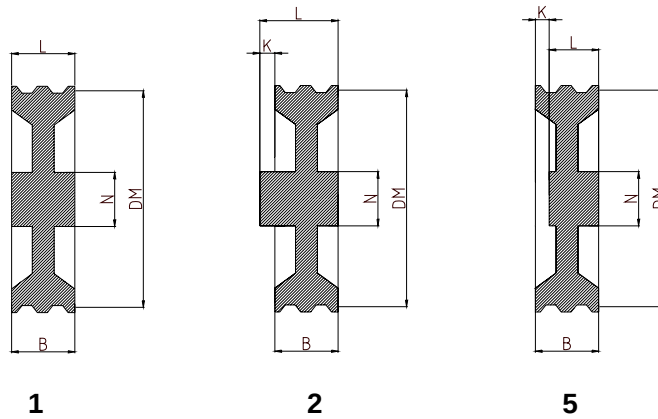


DM	Rillen Groove	N	L	Typ	B	Gewicht weight
45	1	30	24	2	16	0,2
45	2	30	35	2	28	0,3
45	3	30	35	5	40	0,4
50	1	30	24	2	16	0,3
50	2	30	35	2	28	0,4
50	3	30	40	1	40	0,5
56	1	35	24	2	16	0,3
56	2	35	35	2	28	0,4
56	3	35	40	1	40	0,6
63	1	42	24	2	16	0,3
63	2	42	35	2	28	0,6
63	3	42	40	1	40	0,8
71	1	42	24	2	16	0,3
71	2	42	35	2	28	0,6
71	3	50	40	1	40	1,0
75	1	42	24	2	16	0,3
75	2	42	35	2	28	0,6
75	3	50	40	1	40	1,0
80	1	42	24	2	16	0,3
80	2	50	35	2	28	0,6
80	3	50	35	5	40	1,1
85	1	42	24	2	16	0,3
85	2	50	35	2	28	0,7
85	3	50	35	5	40	1,1
90	1	42	24	2	16	0,3
90	2	50	35	2	28	0,7
90	3	60	38	5	40	1,1
95	1	50	24	2	16	0,4
95	2	50	35	2	28	0,8
95	3	60	38	5	40	1,2
100	1	50	24	2	16	0,4
100	2	50	35	2	28	0,9
100	3	60	38	5	40	1,2
106	1	55	24	2	16	0,5
106	2	50	35	2	28	0,9
106	3	60	38	5	40	1,3
112	1	50	24	2	16	0,5
112	2	60	35	2	28	1,0
112	3	60	38	5	40	1,4
118	1	50	24	2	16	0,6
118	2	60	35	2	28	1,1
118	3	60	38	5	40	1,4
125	1	50	24	2	16	0,7
125	2	60	35	2	28	1,2

DM	Rillen Groove	N	L	Typ	B	Gewicht weight
125	3	65	40	1	40	1,5
132	1	55	24	2	16	0,8
132	2	60	35	2	28	1,3
132	3	65	40	1	40	1,6
140	1	55	24	2	16	0,9
140	2	65	38	2	28	1,4
140	3	65	40	1	40	1,6
150	1	55	24	2	16	1,0
150	2	65	38	2	28	1,5
150	3	65	40	1	40	1,8
160	1	60	30	2	16	1,2
160	2	65	38	2	28	1,6
160	3	70	40	1	40	2,4
170	1	60	30	2	16	1,6
170	2	65	38	2	28	1,8
170	3	70	40	1	40	3,0
180	1	60	30	2	16	2,1
180	2	65	38	2	28	2,0
180	3	70	40	1	40	3,5
190	1	65	30	2	16	2,2
190	2	65	38	2	28	2,3
190	3	70	40	1	40	4,0
200	1	65	38	2	16	2,4
200	2	65	38	2	28	2,8
200	3	75	40	1	40	4,4
212	1	65	30	2	16	2,6
212	2	65	38	2	28	3,4
212	3	75	40	1	40	5,0
225	1	70	38	2	16	2,8
225	2	70	38	2	28	4,0
225	3	75	40	1	40	5,3
250	1	70	38	2	16	3,3
250	2	70	38	2	28	4,8
250	3	75	40	1	40	6,0
280	1	70	34	2	16	3,8
280	2	70	38	2	28	5,2
280	3	80	40	1	40	7,0
315	1	70	34	2	16	4,3
315	2	75	38	2	28	6,8
315	3	80	40	1	40	8,2
355	1	70	34	2	16	4,6
355	2	75	40	2	28	8,0
355	3	85	45	2	40	10,0
400	2	80	40	2	28	10,0
400	3	85	45	2	40	11,7

Keilriemenscheibe A (SPA) ungebohrt

Pulley A (SPA) unboored

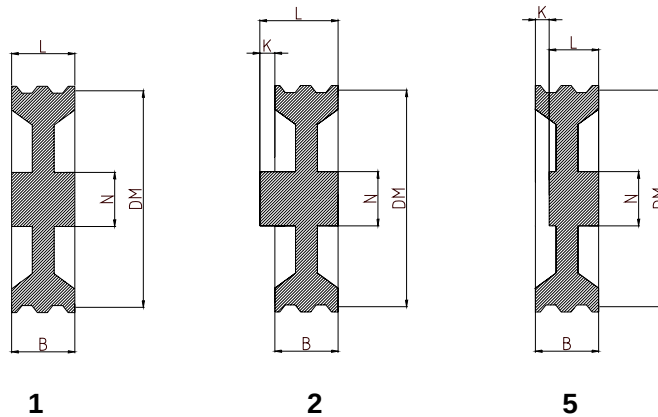


DM	Rillen Groove	N	L	Typ	B	Gewicht weight
40	1	35	34	2	20	0,2
40	2	35	49	2	35	0,3
50	1	35	34	2	20	0,3
50	2	35	49	2	35	0,4
50	3	35	47	5	50	0,5
56	1	35	34	2	20	0,4
56	2	35	49	2	35	0,6
56	3	35	47	5	50	0,7
63	1	42	34	2	20	0,5
63	2	42	49	2	35	0,7
63	3	42	47	5	50	0,8
63	4*	45	60	5	67	1,2
63	5*	50	70	5	82	1,4
71	1	42	34	2	20	0,5
71	2	42	49	2	35	0,8
71	3	42	42	5	50	0,9
71	4*	45	60	5	67	1,4
71	5*	50	70	5	82	1,8
75	1	42	34	2	20	0,5
75	2	42	49	2	35	1,0
75	3	46	42	5	50	1,0
75	4*	45	60	5	67	1,7
75	5*	50	82	1	82	1,9
80	1	42	34	2	20	0,5
80	2	42	49	2	35	1,0
80	3	46	42	5	50	1,1
80	4*	45	60	5	67	1,8
80	5*	55	55	5	82	2,0
85	1	42	34	2	20	0,6
85	2	50	49	2	35	1,2
85	3	50	42	5	50	1,4
85	4*	50	53	5	67	1,9
85	5*	55	55	5	82	2,2
90	1	50	34	2	20	0,8
90	2	50	49	2	35	1,4
90	3	52	42	5	50	1,6
90	4*	50	53	5	67	2,2
90	5*	55	67	5	82	2,5
95	1	50	34	2	20	0,7
95	2	50	49	2	35	1,5
95	3	52	42	5	50	1,8
95	4*	55	53	5	67	2,4

DM	Rillen Groove	N	L	Typ	B	Gewicht weight
95	5*	60	67	5	82	2,7
100	1	50	34	2	20	0,8
100	2	50	49	2	35	1,3
100	3	52	42	5	50	1,9
100	4*	55	53	5	67	2,7
100	5*	60	60	5	82	3,1
106	1	50	34	2	20	0,8
106	2	50	49	2	35	1,6
106	3	55	42	5	50	2,2
106	4*	55	53	5	67	3,2
106	5*	60	60	5	82	3,8
112	1	50	34	2	20	1,0
112	2	50	49	2	35	1,7
112	3	55	42	5	50	2,3
112	4*	55	53	5	67	3,3
112	5*	60	60	5	82	3,9
118	1	50	34	2	20	1,1
118	2	60	49	2	35	1,8
118	3	60	42	5	50	2,4
118	4*	55	53	5	67	3,4
118	5*	60	65	5	82	4,1
125	1	50	34	2	20	1,3
125	2	60	49	2	35	1,9
125	3	60	42	5	50	2,5
125	4*	60	53	5	67	3,4
125	5*	65	65	5	82	4,4
132	1	50	34	2	20	1,4
132	2	60	49	2	35	2,2
132	3	60	42	5	50	2,5
132	4*	60	53	5	67	3,5
132	5*	65	65	5	82	4,7
140	1	60	34	2	20	1,5
140	2	60	49	2	35	2,3
140	3	60	42	5	50	2,6
140	4*	60	53	5	67	3,6
140	5*	65	65	5	82	4,9
150	1	60	36	2	20	1,6
150	2	60	49	2	35	2,5
150	3	60	42	5	50	2,9
150	4*	60	53	5	67	4,0
150	5*	65	65	5	82	5,1
160	1	60	36	2	20	1,7

* = DM+4 mm/ F1 mm

Keilriemenscheibe A (SPA) ungebohrt

Pulley A (SPA) unboored

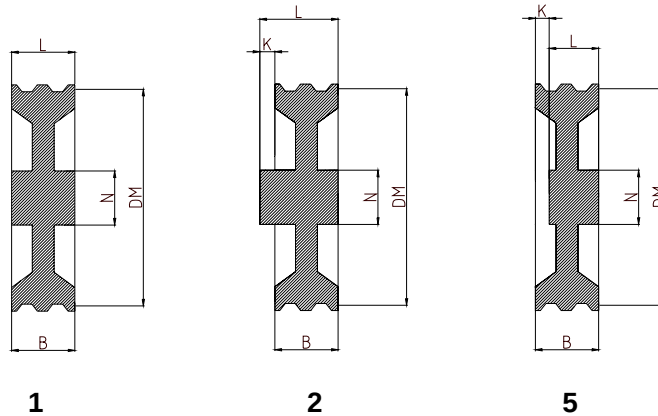


DM	Rillen Groove	N	L	Typ	B	Gewicht weight
160	2	60	49	2	35	2,4
160	3	60	42	5	50	2,8
160	4*	60	60	5	67	3,6
160	5*	65	70	5	82	5,4
170	1	60	36	2	20	2,0
170	2	60	49	2	35	2,9
170	3	60	42	5	50	3,2
170	4*	60	60	5	67	4,2
170	5*	65	70	5	82	5,8
180	1	65	36	2	20	2,0
180	2	63	49	2	35	3,1
180	3	70	42	5	50	3,6
180	4*	70	60	5	67	4,6
180	5*	75	70	5	82	6,1
190	1	65	36	2	20	2,0
190	2	70	49	2	35	3,2
190	3	70	42	5	50	4,0
190	4*	75	60	5	67	5,2
190	5*	75	70	5	82	6,3
200	1	70	36	2	20	2,4
200	2	70	49	2	35	2,8
200	3	75	42	5	50	4,2
200	4*	70	60	5	67	4,9
200	5*	75	70	5	82	6,4
212	1	70	36	2	20	2,7
212	2	70	49	2	35	3,4
212	3	75	42	5	50	4,4
212	4*	70	60	5	67	5,6
212	5*	75	70	5	82	6,8
225	1	70	36	2	20	2,7
225	2	75	49	2	35	3,8
225	3	75	42	5	50	4,6
225	4*	75	60	5	67	6,5
225	5*	75	70	5	82	7,2
236	1	70	36	2	20	3,3
236	2	75	49	2	35	4,1
236	3	75	47	5	50	4,9
236	4*	80	60	5	67	6,2
236	5*	80	70	5	82	7,5
250	1	75	36	2	20	3,4
250	2	75	49	2	35	4,3
250	3	80	47	5	50	5,3

* = DM+4 mm/ F1 mm

DM	Rillen Groove	N	L	Typ	B	Gewicht weight
250	4*	80	60	5	67	7,0
250	5*	80	70	5	82	7,8
280	1	75	44	2	20	3,9
280	2	75	53	2	35	5,3
280	3	80	47	5	50	6,5
280	4*	85	60	5	67	8,5
280	5*	85	70	5	82	9,9
300	1	80	44	2	20	4,2
300	2	80	53	2	35	5,9
300	3	85	47	5	50	7,5
300	4*	90	60	5	67	9,8
300	5*	90	70	5	82	11,3
315	1	80	44	2	20	4,7
315	2	80	53	2	35	6,6
315	3	85	47	5	50	8,7
315	4*	90	60	5	67	11,1
315	5*	90	70	5	82	12,5
355	1	80	44	2	20	5,5
355	2	85	53	2	35	7,7
355	3	90	47	5	50	9,5
355	4*	90	60	5	67	11,8
355	5*	95	70	5	82	13,8
400	1*	85	50	2	22	6,8
400	2*	85	53	2	37	8,8
400	3*	95	47	5	52	10,5
400	4*	95	67	1	67	12,4
400	5*	100	82	1	82	15,9
450	1*	90	50	2	22	7,5
450	2*	85	53	2	37	9,4
450	3*	95	47	5	52	12,1
450	4*	100	67	1	67	14,2
450	5*	100	82	1	82	18,3
500	1*	90	50	2	22	10,5
500	2*	90	55	2	37	10,7
500	3*	100	60	2	52	13,4
500	4*	100	67	1	67	16,2
500	5*	100	82	1	82	22,8
560	1*	95	60	2	22	14,0
560	2*	95	60	2	37	13,1
560	3*	100	74	2	52	15,6
560	4*	105	67	1	67	19,4
560	5*	105	82	1	82	24,5
630	2*	100	77	2	37	15,4
630	3*	100	74	2	52	19,2
630	4*	110	80	2	67	25,0
630	5*	110	82	1	82	28,0

Keilriemenscheibe B (SPB) ungebohrt

Pulley B (SPB) unboored

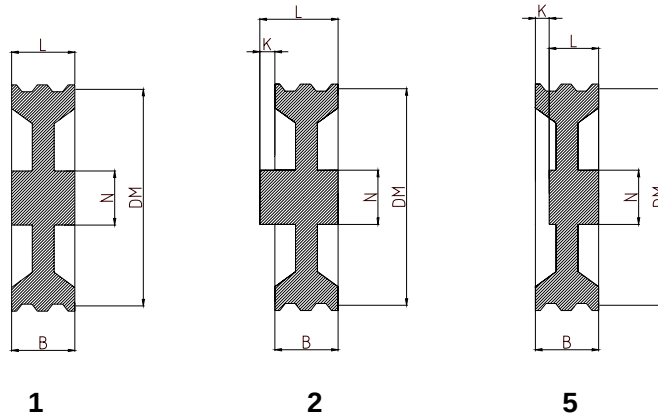


DM	Rillen Groove	N	L	Typ	B	Gewicht weight
56	1	42	41	2	25	0,6
56	2	45	60	2	44	1,0
56	3	50	62	5	63	1,1
63	1	45	41	2	25	0,7
63	2	50	60	2	44	1,2
63	3	50	62	5	63	1,2
71	1	45	41	2	25	0,7
71	2	48	60	2	44	1,3
71	3	50	55	5	63	1,6
75	1	45	41	2	25	0,8
75	2	48	60	2	44	1,4
75	3	50	62	5	63	1,8
80	1	50	41	2	25	1,0
80	2	50	60	2	44	1,6
80	3	50	55	5	63	2,0
80	4*	52	70	5	86	2,4
80	5*	45	80	5	105	2,7
85	1	50	41	2	25	1,1
85	2	50	60	2	44	1,7
85	3	55	55	5	63	2,1
85	4*	60	70	5	86	2,7
85	5*	60	75	5	105	3,0
90	1	50	41	2	25	1,1
90	2	50	60	2	44	1,8
90	3	55	55	5	63	2,3
90	4*	60	70	5	86	3,0
90	5*	60	75	5	105	3,3
95	1	50	41	2	25	1,2
95	2	55	60	2	44	2,0
95	3	55	67	2	63	2,5
95	4*	60	70	5	86	2,9
95	5*	60	75	5	105	3,6
100	1	55	41	2	25	1,3
100	2	55	60	2	44	2,1
100	3	60	55	5	63	2,8
100	4*	60	70	5	86	3,8
100	5*	65	75	5	105	4,4
100	6*	65	124	1	124	5,2
106	1	55	41	2	25	1,4
106	2	55	60	2	44	2,0
106	3	60	55	5	63	3,0
106	4*	60	70	5	86	4,3

DM	Rillen Groove	N	L	Typ	B	Gewicht weight
106	5*	65	75	5	105	5,1
106	6*	65	124	1	124	6,0
112	1	55	41	2	25	1,5
112	2	55	60	2	44	2,3
112	3	60	55	5	63	3,1
112	4*	60	70	5	86	4,7
112	5*	70	75	5	105	5,6
112	6*	70	85	5	124	6,1
118	1	55	41	2	25	1,5
118	2	55	60	2	44	2,4
118	3	60	55	5	63	3,2
118	4*	60	70	5	86	5,2
118	5*	70	75	5	105	7,2
118	6*	70	85	5	124	6,6
125	1	55	41	2	25	1,6
125	2	55	60	2	44	2,5
125	3	60	55	5	63	3,2
125	4*	65	70	5	86	4,7
125	5*	70	75	5	105	8,6
125	6*	75	85	5	124	8,0
132	1	60	41	2	25	1,8
132	2	60	60	2	44	2,6
132	3	65	55	5	63	3,4
132	4*	70	70	5	86	6,3
132	5*	70	75	5	105	9,4
132	6*	75	85	5	124	8,5
140	1	65	41	2	25	2,1
140	2	65	60	2	44	2,9
140	3	70	55	5	63	3,9
140	4*	70	70	5	86	6,9
140	5*	75	75	5	105	7,5
140	6*	75	85	5	124	11,4
150	1	65	43	2	25	2,4
150	2	70	48	2	44	3,2
150	3	70	60	5	63	4,2
150	4*	75	70	5	86	6,7
150	5*	75	75	5	105	8,4
150	6*	80	85	5	124	12,1
160	1	65	43	2	25	2,5
160	2	70	48	2	44	3,3
160	3	70	60	5	63	4,6
160	4*	80	70	5	86	7,0

* = Dm+5,5 mm / F+2 mm

Keilriemenscheibe B (SPB) ungebohrt

Pulley B (SPB) unboored

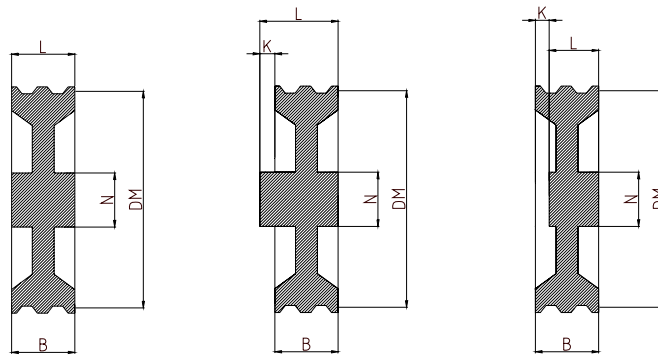

1

2

5


DM	Rillen Groove	N	L	Typ	B	Gewicht weight
160	5*	80	75	5	105	9,3
160	6*	85	85	5	124	12,8
170	1	70	43	2	25	2,8
170	2	70	48	2	44	3,4
170	3	70	60	5	63	4,8
170	4*	80	70	5	86	7,2
170	5*	85	75	5	105	8,9
170	6*	85	85	5	124	13,1
180	1	70	43	2	25	3,1
180	2	70	48	2	44	3,9
180	3	75	60	5	63	5,2
180	4*	80	70	5	86	7,4
180	5*	85	75	5	105	9,0
180	6*	90	85	5	124	10,8
190	1	70	43	2	25	3,1
190	2	70	48	2	44	4,2
190	3	75	60	5	63	5,4
190	4*	85	70	5	86	7,6
190	5*	90	75	5	105	9,2
190	6*	95	85	5	124	12,0
200	1	70	43	2	25	3,4
200	2	75	48	2	44	4,4
200	3	75	60	5	63	5,8
200	4*	85	60	5	86	7,9
200	5*	90	80	5	105	9,5
200	6*	95	90	5	124	12,2
212	1	75	43	2	25	3,7
212	2	75	48	2	44	4,6
212	3	80	60	5	63	6,1
212	4*	90	70	5	86	7,7
212	5*	90	80	5	105	10,3
212	6*	95	90	5	124	13,5
225	1	75	43	2	25	4,0
225	2	75	48	2	44	5,4
225	3	80	60	5	63	6,9
225	4*	90	70	5	86	8,6
225	5*	90	80	5	105	11,7
225	6*	95	90	5	124	14,7
250	1	75	43	2	25	4,2
250	2	75	55	2	44	6,1
250	3	80	60	5	63	8,6
250	4*	90	70	5	86	9,8

DM	Rillen Groove	N	L	Typ	B	Gewicht weight
250	5*	100	80	5	105	13,2
250	6*	100	90	5	124	17,0
280	1	80	49	2	25	5,7
280	2	80	55	2	44	7,0
280	3	90	60	5	63	9,6
280	4*	90	70	5	86	11,5
280	5*	100	80	5	105	15,5
280	6*	100	90	5	124	18,0
300	1	80	49	2	25	5,9
300	2	80	55	2	44	7,5
300	3	90	67	2	63	10,5
300	4*	95	80	5	86	12,4
300	5*	100	80	5	105	16,5
300	6*	100	90	5	124	18,2
315	1	80	49	2	25	6,4
315	2	85	55	2	44	8,2
315	3	90	67	2	63	12,9
315	4*	95	80	5	86	13,0
315	5*	100	80	5	105	17,6
315	6*	100	90	5	124	20,6
355	1	85	49	2	25	7,0
355	2	90	55	2	44	9,7
355	3	95	67	2	63	13,4
355	4*	100	80	5	86	18,2
355	5*	105	75	5	105	18,7
355	6*	110	90	5	124	19,7
400	1	90	49	2	29	8,4
400	2	90	55	2	48	10,0
400	3	95	67	1	67	14,3
400	4*	100	80	5	86	18,5
400	5*	105	85	5	105	22,5
400	6*	110	90	5	124	28,0
450	1	90	55	2	29	9,8
450	2	90	55	2	48	10,8
450	3	95	67	1	67	15,0
450	4*	105	80	5	86	20,5
450	5*	110	80	5	105	26,0
450	6*	115	90	5	124	28,9
500	1	90	55	2	29	10,7
500	2	100	59	2	48	13,7
500	3	100	67	1	67	15,2
500	4*	100	80	5	86	21,3

* = Dm+5,5 mm / F+2 mm

Keilriemenscheibe B (SPB) ungebohrt

Pulley B (SPB) unbored

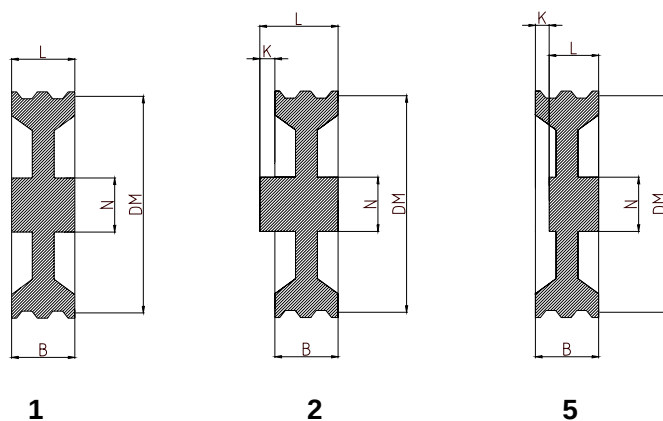


DM	Rillen Groove	N	L	Typ	B	Gewicht weight
500	5*	115	80	5	105	30,0
500	6*	120	90	5	124	33,8
560	1	100	55	2	29	12,3
560	2	100	55	2	48	15,0
560	3	100	67	1	67	24,2
560	4*	115	80	5	86	26,0
560	5*	120	80	5	105	34,4
560	6*	120	90	5	124	39,0
630	1	100	70	2	29	16,2
630	2	100	80	2	48	20,2
630	3	100	80	2	67	27,0
630	4*	120	86	1	86	30,8
630	5*	125	90	5	105	37,2
630	6*	130	100	5	124	44,0

* = Dm+5,5 mm / F+2 mm

Keilriemenscheibe C (SPC) ungebohrt

Pulley C (SPC) unbores

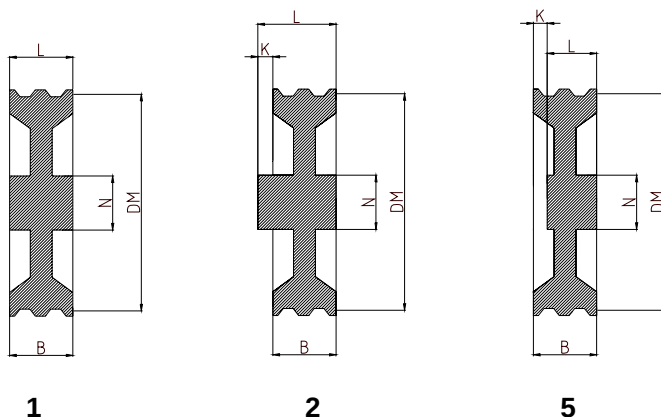


DM	Rillen Groove	N	L	Typ	B	Gewicht weight
100	1	65	45	2	38	1,8
110	1	65	45	2	38	2,0
120	1	65	45	2	38	2,3
130	1	65	45	2	38	2,6
130	2	65	50	5	64	4,6
140	1	70	45	2	38	2,9
140	2	70	50	5	64	5,0
140	3	70	65	5	90	6,6
150	1	70	45	2	38	3,1
150	2	70	50	5	64	5,3
150	3	70	65	5	90	7,5
150	4	70	80	5	116	10,4
160	1	70	45	2	38	3,7
160	2	70	50	5	64	5,4
160	3	70	65	5	90	9,0
160	4	75	80	5	116	11,6
170	1	75	45	2	38	4,0
170	2	80	50	5	64	6,1
170	3	80	65	5	90	9,6
170	4	80	80	5	116	12,0
180	1	70	54	2	38	4,2
180	2	85	64	1	64	7,2
180	3	85	90	1	90	10,4
180	4	85	95	5	116	10,5
180	5	85	100	5	142	18,0
180	6	95	115	5	168	23,6
190	1	70	54	2	38	4,6
190	2	85	64	2	64	6,7
190	3	85	90	1	90	10,6
190	4	85	95	5	116	11,0
190	5	85	100	5	142	18,5
200	1	70	54	2	38	4,8
200	2	85	64	1	64	7,8
200	3	85	90	1	90	8,8
200	4	90	95	5	116	11,2
200	5	90	100	5	142	15,4
200	6	100	125	5	168	27,0
225	1	80	54	2	38	5,5
225	2	90	64	1	64	7,8
225	3	90	90	1	90	10,6
225	4	95	95	5	116	13,1
225	5	100	100	5	142	16,7
225	6	100	115	5	168	35,0
250	1	90	54	2	38	7,3
250	2	90	64	1	64	8,8
250	3	90	90	1	90	11,0

DM	Rillen Groove	N	L	Typ	B	Gewicht weight
250	4	95	95	5	116	15,3
250	5	100	100	5	142	19,0
250	6	100	115	5	168	23,7
280	1	90	54	2	38	8,7
280	2	95	64	1	64	10,9
280	3	95	90	1	90	15,6
280	4	100	95	5	116	17,5
280	5	105	100	5	142	20,5
280	6	110	115	5	168	27,0
315	1	90	54	2	38	9,1
315	2	95	74	2	64	13,0
315	3	95	90	1	90	17,1
315	4	100	95	5	116	20,0
315	5	105	100	5	142	24,7
315	6	120	115	5	168	31,2
335	2	95	74	2	64	14,0
335	3	95	90	1	90	18,3
335	4	100	95	5	116	22,4
335	5	105	100	5	142	28,3
335	6	120	115	5	168	34,4
355	2	100	74	2	64	15,2
355	3	110	90	1	90	19,2
355	4	110	95	5	116	25,8
355	5	120	100	5	142	32,0
355	6	120	115	5	168	36,2
400	2	110	80	2	64	16,4
400	3	110	90	1	90	20,6
400	4	110	105	5	116	28,0
400	5	120	110	5	142	32,0
400	6	130	115	5	168	45,2
450	2	110	80	2	64	21,1
450	3	120	90	1	90	26,3
450	4	120	95	5	116	31,1
450	5	130	100	5	142	42,2
450	6	130	120	5	168	48,5
500	3	120	90	1	90	28,4
500	4	120	105	5	116	34,1
500	5	130	110	5	142	48,2
500	6	130	120	5	168	52,5
560	3	120	90	1	90	31,1
560	4	120	105	5	116	39,0
560	5	130	110	5	142	54,1
560	6	140	120	5	168	61,5
630	3	130	90	1	90	38,5
630	4	130	105	5	116	48,1
630	5	140	110	5	142	62,2
630	6	140	120	5	168	73,2

Verstelbare Keilriemenscheibe


Variable pulley

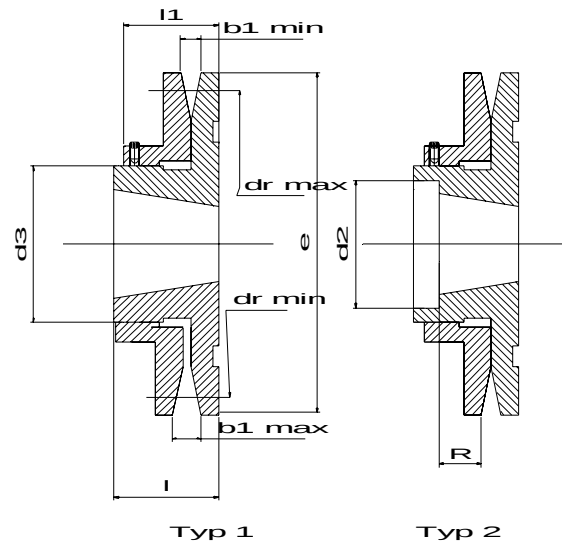

	Typ	Rillen Groove	Taper	e	l	L1	bi		dr		dz	d3	R		Riemtypen Beltyps
							min	max	min	max					
RB-93	2	1	1108	93	36,5	29	13	20,5	57	78	39	50	13,5	M6x6Z	10x6
									59	85				N° 4 A	13x8
RB-108	1	1	1215	108	38	30,5	13	20,5	68	92	—	60	—	M6x6Z	10x6
									70	100				N° 4 A	13x8
									75	93				SPZ	
									76	102				SPA	
RB-120	1	1	1215	120	38	30,5	13	20,5	80	104	—	60	—	M6x6Z	10x6
									82	112				N° 4 A	13x8
									87	105				SPZ	
									88	114				SPA	
RB-138	1	1	1615	138	38	30,5	13	20,5	98	122	—	74	—	M6x6Z	10x6
									100	130				N° 4 A	13x8
									105	123				SPZ	
									106	132				SPA	
RB-160	2	1	1615	160	45	35,5	17	26,5	108	138	58	74	6,5	M8x8A	13x8
									112	150				N° 4 B	17x11
									114	140				SPA	
									117	153				SPB	
RB-180	2	1	2012	180	45	35,5	17	26,5	128	158	71	90	12,5	M8x8A	13x8
									132	170				N° 4 B	17x11
									134	160				SPA	
									137	173				SPB	
RB-200	2	1	2012	200	45	35,5	17	26,5	149	177	71	90	12,5	M8x8A	13x8
									152	190				N° 4 B	17x11
									155	179				SPA	
									159	193				SPB	

Verstellbare Keilriemenscheibe

Variable pulley

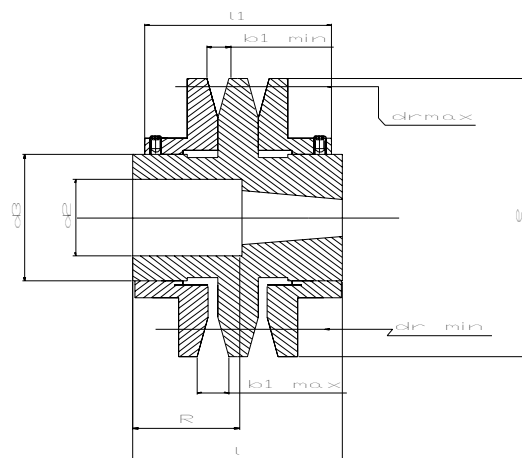

Typ 3

	Typ	Rillen Groove	Taper	e	l	h	b1		d _r		d ₂	d ₃	R	Riementyp Beltyp	
							min	max	min	max					
RB2-108	3	2	1215	108	73	58	13	20,5	68	92	48,5	60	34,5	M6x6	Z 10x6
									70	100				N° 8	A 13x8
									75	93					SPZ
									76	102					SPA
RB2-120	3	2	1215	120	73	58	13	20,5	80	104	48,5	60	34,5	M6x6	Z 10x6
									82	112				N° 8	A 13x8
									87	105					SPZ
									88	114					SPA
RB2-138	3	2	1615	138	73	58	13	20,5	98	122	58,5	74	34,5	M6x6	Z 10x6
									100	130				N° 8	A 13x8
									105	123					SPZ
									106	132					SPA
RB2-160	3	2	1615	160	87	68	17	26,5	108	138	58,5	74	48,5	M8x8	A 13x8
									112	150				N° 8	B 17x11
									114	140					SPA
									117	153					SPB
RB2-180	3	2	2012	180	87	68	17	26,5	128	158	71	90	54	M8x8	A 13x8
									132	170				N° 8	B 17x11
									134	160					SPA
									137	173					SPB
RB2-200	3	2	2012	200	87	68	17	26,5	149	177	71	90	54	M8x8	A 13x8
									152	190				N° 8	B 17x11
									155	179					SPA
									159	193					SPB

Klassische Keilriemen Typ Z und A von PIX Europe

Classical Belt Typ Z and A from PIX Europe

Typ Z (10x6 mm)

Typ	Li	L	Typ	Li	L
16*	410	435	36 3/4	935	960
17 1/4*	440	465	37	945	970
18*	460	485	37 1/2	950	975
19*	480	505	38	965	990
19 1/2*	500	525	38 1/4	975	1000
20 1/2*	520	545	39	1000	1025
21*	530	555	40	1016	1041
21 1/4*	540	565	40 1/2	1030	1055
21 1/2*	545	570	41	1040	1065
21 3/4*	555	580	41 1/2	1050	1075
22	560	585	41 3/4	1060	1085
22 1/4	565	590	42	1070	1095
22 1/2	575	600	42 1/2	1080	1105
23	585	610	43	1090	1115
23 1/2	600	625	43 3/4	1100	1125
23 3/4	605	630	44	1120	1145
24	610	635	45	1145	1170
24 3/4	630	655	46	1180	12050
25	635	660	47	1194	1219
25 1/2	650	675	47 3/4	1215	1240
26	660	685	48	1225	1250
26 1/2	670	695	49	1245	1270
27	685	710	50	1270	1295
27 1/2	700	725	50 1/2	1285	1310
28	710	735	51	1300	1325
28 1/2	725	750	52	1320	1345
29	735	760	53	1345	1370
29 1/2	750	775	54	1371	1396
30	765	790	55	1400	1425
30 1/2	775	800	56	1422	1447
30 3/4	785	810	57	1450	1475
31 1/2	800	825	59	1500	1525
32	815	840	59 1/2	1515	1540
32 1/2	825	850	61	1550	1575
33	840	865	62	1575	1600
33 1/2	850	875	63	1600	1625
34	865	890	65	1651	1676
34 1/4	870	895	66	1675	1700
34 1/2	875	900	67	1700	1725
35	890	915	68 1/2	1740	1765
35,5	900	925	69	1750	1775
36	915	940	71	1803	1828
36,5	925	950			

Typ A (13x8 mm)

Typ	Li	L	Typ	Li	L	Typ	Li	L
15*	382	415	46	1168	1201	93	2360	2393
18*	457	490	46 1/2	1180	1213	94	2388	2421
19*	480	513	47	1200	1233	95	2413	2446
20*	508	541	48	1220	1253	96	2438	2471
21*	535	568	48 1/4	1225	1258	97	2464	2497
21 3/4	552	585	49	1250	1283	97 1/2	2475	2508
22	560	593	50	1270	1303	98	2500	2533
23	587	620	51	1300	1333	100	2540	2573
23 1/2	600	633	51 1/2	1307	1340	102	2591	2624
24	610	643	52	1320	1353	104	2650	2683
24 1/2	620	653	52 1/2	1337	1370	105	2667	2700
24 3/4	630	663	53	1346	1379	107	2725	2758
25	637	670	53 1/4	1355	1388	108	2743	2776
25 1/2	647	680	54	1372	1405	110	2800	2833
26	660	693	55	1400	1433	112	2845	2878
26 1/2	670	703	56	1422	1455	113	2870	2903
27	686	719	57	1450	1483	116	2962	2979
27 1/2	700	733	58	1475	1508	118	3000	3033
28	710	743	59	1500	1533	120	3048	3081
29	737	770	60	1525	1558	124	3150	3183
29 1/2	750	783	61	1550	1583	128	3250	3283
30	767	800	62	1575	1608	130	3302	3335
30 1/2	775	808	63	1600	1633	132	3350	3383
31	787	820	64	1625	1658	134	3404	3437
31 1/2	800	833	65	1650	1683	136	3454	3487
32	813	846	66	1676	1709	140	3550	3583
32 1/2	825	858	67	1700	1733	144	3658	3691
33	838	871	68	1725	1758	147	3737	3770
33 1/4	847	880	69	1750	1783	148	3750	3783
33 1/2	850	883	70	1775	1808	155	3937	3970
33 3/4	855	888	70 3/4	1780	1813	158	4000	4033
34	867	900	71	1800	1833	162	4115	4148
34 1/2	875	908	72	1825	1858	167	4250	4283
35	900	933	73	1854	1887	173	4394	4427
36	914	947	74	1880	1913	177	4500	4533
36 1/2	925	958	75	1900	1933	180	4572	4605
37	942	975	76	1930	1963	187	4750	4783
37 1/2	950	983	77	1956	1989	197	5000	5033
38	965	998	78	1980	2013	210	5334	5367
38 1/2	975	1008	79	2000	2033	217	5477	5510
39	992	1025	80	2032	2065			
39 1/2	1000	1033	81	2060	2093			
40	1016	1049	82	2083	2116			
40 1/2	1030	1063	83	2100	2133			
41	1041	1074	83 1/2	2120	2153			
41 1/2	1050	1083	84	2134	2167			
41 3/4	1060	1093	85	2160	2193			
42	1067	1100	86	2187	2220			
42 1/2	1075	1108	87	2212	2245			
43	1100	1133	88	2240	2273			
43 1/2	1105	1138	89	2267	2300			
44	1120	1153	90	2286	2319			
44 1/2	1132	1165	90 1/2	2300	2333			
45	1143	1176	91	2311	2344			
45 1/2	1150	1183	92	2337	2370			

Weitere Größen lieferbar / Other sizes available

Klassische Keilriemen Typ B und C von PIX Europe

Classical Belt Typ B and C from PIX Europe

Typ B (17x11 mm)

Typ	Li	L	Typ	Li	L	Typ	Li	L	Typ	Li	L
22 1/2	570	613	51	1300	1343	96	2438	2481	188	4777	4820
23	587	630	52	1320	1363	96 1/2	2450	2493	192	4877	4920
24	612	655	53	1350	1393	97	2465	2508	195	4953	4996
24 1/4	615	658	53 1/2	1360	1403	97 1/2	2477	2520	197	5000	5043
25	637	680	54	1372	1415	98	2500	2543	204	5182	5225
26	650	693	55	1400	1443	99	2515	2558	208	5300	5343
27	686	729	55 1/2	1412	1455	100	2540	2583	210	5334	5377
28	710	753	56	1422	1465	102	2600	2643	217	5507	5550
28 1/2	725	768	57	1450	1493	103	2616	2659	221	5577	5620
29	737	780	58	1473	1516	104	2650	2693	223	5632	5675
29 1/2	750	793	59	1500	1543	105	2667	2710	224	5657	5700
30	762	805	60	1525	1568	106	2700	2743	225	5682	5725
30 1/2	775	818	61	1550	1593	107	2718	2761	228	5757	5800
31	787	830	62	1575	1618	108	2750	2793	229	5782	5825
31 1/2	800	843	63	1600	1643	110	2800	2843	237	6000	6043
32	812	855	64	1625	1668	112	2845	2888	240	6062	6105
32 1/4	822	865	64 1/2	1642	1685	112 1/2	2857	2900	248	6267	6310
32 1/2	825	868	65	1650	1693	114	2900	2943	249	6287	6330
33	838	881	66	1676	1719	115	2921	2964	253	6392	6435
33 1/2	850	893	66 1/4	1682	1725	116	2950	2993	255	6442	6485
34	867	910	66 1/2	1692	1735	118	3000	3043	256	6502	6545
34 1/2	875	918	67	1700	1743	120	3048	3091	259	6542	6585
35	889	932	67 1/4	1712	1755	124	3150	3193	265	6700	6743
35 1/2	900	943	68	1725	1768	126	3200	3243	269	6850	6893
35 3/4	907	950	69	1750	1793	127	3227	3270	270	6825	6868
36	917	960	69 1/2	1761	1804	128	3250	3293	276	7000	7043
36 1/2	925	968	70	1775	1818	130	3302	3345	280	7100	7143
36 3/4	937	980	71	1800	1843	131	3327	3370	285	7207	7250
37	942	985	72	1829	1872	132	3350	3393	300	7587	7630
37 1/2	950	993	73	1850	1893	133	3378	3421	315	7967	8010
38	965	1008	74	1880	1923	134	3407	3450	330	8347	8390
38 1/2	975	1018	75	1900	1943	135	3429	3472	345	8727	8770
39	990	1033	76	1930	1973	136	3450	3493	360	9107	9150
39 1/2	1000	1016	77	1950	1993	140	3550	3593	361	9132	9175
40	1016	1059	78	1981	2004	144	3658	3701	364	9207	9250
40 1/2	1030	1073	79	2000	2043	147	3737	3780	366	9262	9305
41	1040	1083	80	2032	2075	148	3750	3793	394	9972	10015
41 1/2	1050	1093	80 3/4	2050	2093	151	3850	3893	433	10957	11000
41 3/4	1060	1103	81	2060	2103	152	3861	3904	472	11957	12000
42	1067	1110	82	2083	2126	154	3912	3955			
42 1/2	1075	1118	83	2108	2151	155	3950	3993			
43	1090	1133	83 1/2	2120	2163	157	3987	4030			
43 1/2	1100	1143	84	2134	2177	158	4000	4043			
44	1120	1163	85	2160	2203	161	4087	4130			
44 1/4	1127	1170	86	2187	2230	162	4115	4158			
45	1142	1185	86 1/2	2200	2243	163	4142	4185			
46	1175	1218	87	2215	2258	165	4200	4243			
46 1/2	1180	1223	88	2240	2283	167	4250	4293			
46 3/4	1187	1230	89	2261	2304	168	4267	4310			
47	1200	1243	90	2286	2329	173	4394	4437			
47 1/4	1202	1245	91	2312	2355	175	4450	4493			
47 1/2	1215	1258	92	2337	2380	177	4500	4543			
48	1225	1268	93	2360	2403	180	4572	4615			
49	1250	1293	94	2388	2413	186	4727	4770			
50	1275	1318	95	2413	2456	187	4750	4793			

Typ C (22x14 mm)

Typ	Li	L	Typ	Li	L	Typ	Li	L
33 3/4	858	920	116	2950	3012	330	8382	8444
37 1/2	950	1012	117	2965	3027	336	8500	8562
39 3/4	1013	1075	118	3000	3062	345	8723	8785
43	1090	1152	120	3048	3110	360	9107	9169
45	1150	1212	124	3150	3212	394	10000	10062
46	1168	1230	126	3200	3262	420	10632	10694
48	1220	1282	128	3250	3312	424	10733	10795
49	1250	1312	130	3302	3364			
51	1295	1357	132	3350	3412			
52	1320	1382	134	3404	3466			
53	1350	1412	136	3456	3518			
54	1372	1434	138	3498	3560			
55	1400	1462	140	3550	3612			
56	1425	1487	142	3607	3669			
59	1500	1592	144	3658	3720			
60	1524	1586	147	3733	3795			
61	1560	1622	148	3750	3812			
62 1/4	1583	1645	150	3808	3870			
63	1600	1662	153	3902	3964			
65	1650	1712	158	4000	4062			
67	1700	1762	160	4064	4126			
68	1727	1789	161 1/2	4100	4162			
70	1778	1840	162	4115	4177			
71	1798	1860	165	4193	4255			
75	1900	1962	166	4216	4278			
78	1978	2040	168	4267	4329			
80	2032	2094	173	4394	4456			
81	2057	2119	177	4500	4562			
83	2108	2170	180	4572	4634			
84	2134	2196	187	4570	4812			
85	2159	2221	195	4953	5015			
86	2184	2246	197	5000	5062			
87	2208	2270	204	5182	5244			
89	2261	2323	208	5300	5362			
90	2286	2348	210	5334	5396			
93	2360	2422	216	5486	5548			
95	2413	2475	222	5600	5662			
96	2438	2500	225	5678	5740			
97	2462	2524	228	5753	5815			
97 1/2	2477	2539	236	6000	6062			
98	2500	2562	238	6045	6107			
99	2525	2587	240	6062	6124			
100	2540	2602	248	6263	6325			
101	2560	2622	250	6300	6362			
102	2591	2653	255	6438	6500			
104	2642	2704	265	6700	6762			
105	2667	2729	270	6822	6884			
106	2692	2754	276	6973	7035			
108	2750	2812	280	7100	7162			
110	2800	2862	285	7203	7265			
111	2818	2880	297	7500	7562			
112	2845	2907	300	7582	7644			
112 1/2	2858	2920	303	7650	7712			
114	2888	2950	314	7976	8038			
115	2921	2983	316	8000	8062			

Weitere Größen lieferbar / Other sizes available

Klassische Keilriemen Typ D, E, 20“, 25“, 45“ und 50“ von PIX Europe

Classical Belt Typ D, E, 20“, 25“, 45“ and 50“ from PIX Europe

Typ D (32x19 mm) Typ E (40x25 mm) Typ 20“ (20x12,5) Typ 25“ (25x16 mm) Typ 45“ (45x20 mm) Typ 50“ (50x20 mm)

Typ	Li	L
98	2500	2576
104	2650	2726
110	2800	2876
118	3000	3076
120	3048	3124
124	3150	3226
128	3251	3327
136	3454	3530
137	3475	3551
140	3550	3626
144	3658	3734
154	3914	3990
158	4013	4089
162	4115	4191
170	4310	4386
173	4394	4470
177	4500	4576
180	4572	4648
187	4750	4826
195	4953	5029
197	5000	5076
204	5182	5258
205	5209	5285
207	5259	5335
210	5334	5410
223	5600	5676
225	5659	5735
236	5940	6016
238	6000	6076
240	6039	6115
248	6244	6320
250	6294	6370
255	6424	6500
266	6700	6776
270	6804	6880
282	7100	7176
285	7184	7260
298	7500	7576
300	7565	7641
314	7924	8000
316	7974	8050
326	8224	8300
330	8329	8405
345	8709	8785
360	9090	9166
390	9849	9925
394	10000	10076
420	10624	10700
441	11200	11276
480	12139	12215
540	13659	13735
600	15184	15260

Typ	Li	L
180	4575	4680
197	5000	5105
210	5335	5440
220	5600	5705
226	5660	5765
240	6015	6120
248	6220	6325
255	6400	6505
270	6780	6885
280	7100	7205
285	7160	7265
295	7500	7605
300	7540	7645
316	7950	8055
330	8305	8410
345	8685	8790
354	9000	9105
360	9065	9170
394	9930	10035
420	10600	10705
441	11200	11305
480	12115	12220
492	12500	12605
540	13635	13740
600	15160	15265

L
1800
1875
1900
1925
1950
2000
2050
2120
2200
2240
2240
2360
2500
2600
2650
2800
3000
3150
3250
3350
3450
3550
3650
3750
4000
4250
4500
4750
5000
5300
5600
6000

L
1800
1900
1950
2000
2050
2120
2200
2240
2325
2360
2450
2500
2650
2700
2800
2950
3000
3150
3300
3350
3550
3750
3950
4000
4250
4450
4500
4750
5000
5300
5600
5700
6000
6300
6500
6700
7100
7500
8000
8500
9000
9500
10000


L
2000
2300
2500
2650
2750
2850
3000
3150
3250
3300
3500
3750
4000

L
2000
2050
2150
2300
2500
2650
2750
2850
2850
3000
3150
3250
3300
3500
3670
3750
3950
4000

Doppelkeilriemen von PIX Europe

Hexagonalbelt from PIX Europe

	a	s
AA	13	10
BB	17	14
CC	22	19



Typ AA

Typ	L
51	1350
60	1580
61	1600
68	1780
69	1805
71	1855
75	1955
77	2010
80	2085
81	2110
85	2210
90	2340
91	2365
95	2465
96	2490
105	2720
108	2800
112	2895
116	3000
120	3100
128	3305

Typ BB

Typ	L
50	1345
60	1600
75	1980
81	2130
84	2210
85	2235
90	2360
97	2540
105	2740
112	2920
118	3070
120	3125
121	3150
128	3325
144	3735
154	4000
155	4010
158	4090
173	4470
174	4495
180	4645
184	4750
195	5030
210	5410
240	6135
270	6895
300	7655

Typ CC

Typ	L
75	2015
81	2165
85	2265
86	2290
90	2395
96	2545
105	2775
112	2955
120	3155
128	3360
144	3765
153	4000
158	4120
162	4225
173	4500
180	4680
193	5000
195	5060
210	5440
234	6000
240	6155
270	6915
300	7675
313	8000
330	8440
360	9200
390	9965
420	10725

Keilriemen XPZ von PIX Europe

Belts XPZ from PIX Europe

TYP	L	TYP	L	TYP	L
XPZ 587	587	XPZ 1060	1060	XPZ 1520	1520
XPZ 612	612	XPZ 1077	1077	XPZ 1537	1537
XPZ 630	630	XPZ 1080	1080	XPZ 1562	1562
XPZ 637	637	XPZ 1087	1087	XPZ 1587	1587
XPZ 662	662	XPZ 1112	1112	XPZ 1600	1600
XPZ 670	670	XPZ 1120	1120	XPZ 1612	1612
XPZ 687	687	XPZ 1137	1137	XPZ 1662	1662
XPZ 710	710	XPZ 1140	1140	XPZ 1700	1700
XPZ 737	737	XPZ 1162	1162	XPZ 1762	1762
XPZ 750	750	XPZ 1180	1180	XPZ 1800	1800
XPZ 762	762	XPZ 1187	1187	XPZ 1900	1900
XPZ 772	772	XPZ 1202	1202	XPZ 2000	2000
XPZ 787	787	XPZ 1212	1212	XPZ 2030	2030
XPZ 800	800	XPZ 1237	1237	XPZ 2120	2120
XPZ 812	812	XPZ 1250	1250	XPZ 2160	2160
XPZ 825	825	XPZ 1262	1262	XPZ 2240	2240
XPZ 837	837	XPZ 1270	1270	XPZ 2280	2280
XPZ 850	850	XPZ 1287	1287	XPZ 2360	2360
XPZ 860	860	XPZ 1312	1312	XPZ 2410	2410
XPZ 875	875	XPZ 1320	1320	XPZ 2500	2500
XPZ 887	887	XPZ 1340	1340	XPZ 2540	2540
XPZ 900	900	XPZ 1362	1362	XPZ 2650	2650
XPZ 912	912	XPZ 1387	1387	XPZ 2690	2690
XPZ 925	925	XPZ 1400	1400	XPZ 2800	2800
XPZ 937	937	XPZ 1412	1412	XPZ 2840	2840
XPZ 950	950	XPZ 1420	1420	XPZ 3000	3000
XPZ 962	962	XPZ 1437	1437	XPZ 3150	3150
XPZ 987	987	XPZ 1462	1462	XPZ 3170	3170
XPZ 1000	1000	XPZ 1487	1487	XPZ 3350	3350
XPZ 1012	1012	XPZ 1500	1500	XPZ 3550	3550
XPZ 1034	1034	XPZ 1512	1512		

Weitere Größen lieferbar / Other sizes available

Keilriemen XPA von PIX Europe

Belts XPA from PIX Europe

Typ	L	Typ	L	Typ	L
XPA 732	732	XPA 1132	1132	XPA 1582	1582
XPA 757	757	XPA 1157	1157	XPA 1600	1600
XPA 782	782	XPA 1180	1180	XPA 1607	1607
XPA 800	800	XPA 1207	1207	XPA 1632	1632
XPA 807	807	XPA 1232	1232	XPA 1700	1700
XPA 832	832	XPA 1250	1250	XPA 1757	1757
XPA 850	850	XPA 1257	1257	XPA 1800	1800
XPA 857	857	XPA 1272	1272	XPA 1882	1882
XPA 882	882	XPA 1282	1282	XPA 1900	1900
XPA 900	900	XPA 1307	1307	XPA 2000	2000
XPA 907	907	XPA 1320	1320	XPA 2120	2120
XPA 932	932	XPA 1332	1332	XPA 2240	2240
XPA 950	950	XPA 1357	1357	XPA 2360	2360
XPA 957	957	XPA 1382	1382	XPA 2500	2500
XPA 982	982	XPA 1400	1400	XPA 2650	2650
XPA 1000	1000	XPA 1432	1432	XPA 2800	2800
XPA 1070	1070	XPA 1457	1457	XPA 3000	3000
XPA 1030	1030	XPA 1482	1482	XPA 3150	3150
XPA 1060	1060	XPA 1500	1500	XPA 3350	3350
XPA 1082	1082	XPA 1507	1507	XPA 3550	3550
XPA 1107	1107	XPA 1532	1532		
XPA 1120	1120	XPA 1557	1557		

Weitere Größen lieferbar / Other sizes available

Keilriemen XPB von PIX Europe

Belts XPB from PIX Europe

Typ	L	Typ	L	Typ	L
XPB 1250	1250	XPB 1800	1800	XPB 2650	2650
XPB 1260	1260	XPB 1900	1900	XPB 2680	2680
XPB 1320	1320	XPB 2000	2000	XPB 2800	2800
XPB 1340	1340	XPB 2020	2020	XPB 2840	2840
XPB 1400	1400	XPB 2120	2120	XPB 2990	2990
XPB 1410	1410	XPB 2150	2150	XPB 3000	3000
XPB 1500	1500	XPB 2240	2240	XPB 3150	3150
XPB 1510	1510	XPB 2280	2280	XPB 3170	3170
XPB 1590	1590	XPB 2360	2360	XPB 3340	3340
XPB 1600	1600	XPB 2410	2410	XPB 3350	3350
XPB 1690	1690	XPB 2500	2500	XPB 3550	3550
XPB 1700	1700	XPB 2530	2530		

Weitere Größen lieferbar / Other sizes available

Keilriemen XPC von PIX Europe

Belts XPC from PIX Europe

Typ	L	Typ	L	Typ	L
XPC 2000	2000	XPC 2500	2500	XPC 3150	3150
XPC 2120	2120	XPC 2650	2650	XPC 3350	3350
XPC 2240	2240	XPC 2800	2800	XPC 3550	3550
XPC 2360	2360	XPC 3000	3000		

Weitere Größen lieferbar / Other sizes available

Keilriemen SPZ von PIX Europe

Belts SPZ from PIX Europe

TYP	(mm)	TYP	(mm)	TYP	(mm)
SPZ487	487	SPZ1112	1112	SPZ1687	1687
SPZ512	512	SPZ1120	1120	SPZ1700	1700
SPZ562	562	SPZ1137	1137	SPZ1737	1737
SPZ575	575	SPZ1140	1140	SPZ1762	1762
SPZ587	587	SPZ1150	1150	SPZ1787	1787
SPZ612	612	SPZ1162	1162	SPZ1800	1800
SPZ625	625	SPZ1180	1180	SPZ1812	1812
SPZ630	630	SPZ1187	1187	SPZ1837	1837
SPZ637	637	SPZ1200	1200	SPZ1850	1850
SPZ662	662	SPZ1212	1212	SPZ1862	1862
SPZ670	670	SPZ1237	1237	SPZ1887	1887
SPZ687	687	SPZ1250	1250	SPZ1900	1900
SPZ710	710	SPZ1262	1262	SPZ1937	1937
SPZ722	722	SPZ1270	1270	SPZ1987	1987
SPZ737	737	SPZ1280	1280	SPZ2000	2000
SPZ750	750	SPZ1287	1287	SPZ2030	2030
SPZ760	760	SPZ1312	1312	SPZ2037	2037
SPZ772	772	SPZ1320	1320	SPZ2120	2120
SPZ775	775	SPZ1337	1337	SPZ2125	2125
SPZ787	787	SPZ1340	1340	SPZ2137	2137
SPZ800	800	SPZ1347	1347	SPZ2150	2150
SPZ812	812	SPZ1350	1350	SPZ2160	2160
SPZ825	825	SPZ1362	1362	SPZ2175	2175
SPZ837	837	SPZ1375	1375	SPZ2187	2187
SPZ850	850	SPZ1387	1387	SPZ2237	2237
SPZ862	862	SPZ1400	1400	SPZ2240	2240
SPZ875	875	SPZ1412	1412	SPZ2262	2262
SPZ887	887	SPZ1420	1420	SPZ2280	2280
SPZ900	900	SPZ1425	1425	SPZ2287	2287
SPZ912	912	SPZ1437	1437	SPZ2300	2300
SPZ925	925	SPZ1450	1450	SPZ2360	2360
SPZ937	937	SPZ1462	1462	SPZ2410	2410
SPZ940	940	SPZ1470	1470	SPZ2437	2437
SPZ950	950	SPZ1487	1487	SPZ2500	2500
SPZ962	962	SPZ1500	1500	SPZ2540	2540
SPZ987	987	SPZ1512	1512	SPZ2650	2650
SPZ1000	1000	SPZ1520	1520	SPZ2690	2690
SPZ1010	1010	SPZ1537	1537	SPZ2800	2800
SPZ1024	1024	SPZ1560	1560	SPZ2840	2840
SPZ1037	1037	SPZ1562	1562	SPZ2900	2900
SPZ1047	1047	SPZ1587	1587	SPZ3000	3000
SPZ1060	1060	SPZ1600	1600	SPZ3150	3150
SPZ1075	1075	SPZ1612	1612	SPZ3170	3170
SPZ1080	1080	SPZ1637	1637	SPZ3350	3350
SPZ1087	1087	SPZ1650	1650	SPZ3550	3550
SPZ1100	1100	SPZ1662	1662		

Weitere Größen lieferbar / Other sizes available

Keilriemen SPA von PIX Europe

Belts SPA from PIX Europe

TYP	(mm)	TYP	(mm)	TYP	(mm)	TYP	(mm)
SPA732	732	SPA1307	1307	SPA1957	1957	SPA2882	2882
SPA757	757	SPA1320	1320	SPA1982	1982	SPA2932	2932
SPA782	782	SPA1332	1332	SPA2000	2000	SPA2982	2982
SPA800	800	SPA1357	1357	SPA2032	2032	SPA3000	3000
SPA807	807	SPA1382	1382	SPA2057	2057	SPA3032	3032
SPA832	832	SPA1400	1400	SPA2082	2082	SPA3082	3082
SPA850	850	SPA1407	1407	SPA2120	2120	SPA3150	3150
SPA857	857	SPA1425	1425	SPA2132	2132	SPA3182	3182
SPA882	882	SPA1432	1432	SPA2157	2157	SPA3250	3250
SPA900	900	SPA1457	1457	SPA2182	2182	SPA3282	3282
SPA907	907	SPA1482	1482	SPA2207	2207	SPA3350	3350
SPA932	932	SPA1500	1500	SPA2232	2232	SPA3382	3382
SPA950	950	SPA1507	1507	SPA2240	2240	SPA3500	3500
SPA957	957	SPA1532	1532	SPA2282	2282	SPA3550	3550
SPA975	975	SPA1557	1557	SPA2300	2300	SPA3600	3600
SPA982	982	SPA1582	1582	SPA2307	2307	SPA3700	3700
SPA1000	1000	SPA1600	1600	SPA2332	2332	SPA3750	3750
SPA1007	1007	SPA1607	1607	SPA2360	2360	SPA4000	4000
SPA1032	1032	SPA1632	1632	SPA2382	2382	SPA4250	4250
SPA1060	1060	SPA1657	1657	SPA2432	2432	SPA4500	4500
SPA1082	1082	SPA1682	1682	SPA2482	2482	SPA5000	5000
SPA1107	1107	SPA1700	1700	SPA2492	2492		
SPA1120	1120	SPA1707	1707	SPA2500	2500		
SPA1132	1132	SPA1732	1732	SPA2532	2532		
SPA1157	1157	SPA1757	1757	SPA2582	2582		
SPA1180	1180	SPA1782	1782	SPA2607	2607		
SPA1200	1200	SPA1800	1800	SPA2632	2632		
SPA1207	1207	SPA1807	1807	SPA2650	2650		
SPA1232	1232	SPA1832	1832	SPA2682	2682		
SPA1250	1250	SPA1857	1857	SPA2732	2732		
SPA1257	1257	SPA1882	1882	SPA2782	2782		
SPA1272	1272	SPA1900	1900	SPA2800	2800		
SPA1282	1282	SPA1907	1907	SPA2832	2832		
SPA1300	1300	SPA1932	1932	SPA2847	2847		

Weitere Größen lieferbar / Other sizes available

Keilriemen SPB von PIX Europe

Belts SPB from PIX Europe

TYP	Wirklänge	TYP	Wirklänge	TYP	Wirklänge
SPB1250	1250	SPB2360	2360	SPB4250	4250
SPB1260	1260	SPB2400	2400	SPB4310	4310
SPB1320	1320	SPB2410	2410	SPB4370	4370
SPB1400	1400	SPB2500	2500	SPB4500	4500
SPB1410	1410	SPB2530	2530	SPB4560	4560
SPB1500	1500	SPB2600	2600	SPB4750	4750
SPB1510	1510	SPB2650	2650	SPB5000	5000
SPB1600	1600	SPB2675	2675	SPB5300	5300
SPB1690	1690	SPB2680	2680	SPB5380	5380
SPB1700	1700	SPB2750	2750	SPB5600	5600
SPB1750	1750	SPB2800	2800	SPB5680	5680
SPB1780	1780	SPB2840	2840	SPB5990	5990
SPB1800	1800	SPB2850	2850	SPB6000	6000
SPB1900	1900	SPB3000	3000	SPB6300	6300
SPB2000	2000	SPB3150	3150	SPB6340	6340
SPB2020	2020	SPB3170	3170	SPB6700	6700
SPB2025	2025	SPB3270	3270	SPB6720	6720
SPB2120	2120	SPB3340	3340	SPB7100	7100
SPB2125	2125	SPB3350	3350	SPB7500	7500
SPB2150	2150	SPB3550	3550	SPB7610	7610
SPB2200	2200	SPB3750	3750	SPB7990	7990
SPB2240	2240	SPB3800	3800	SPB8000	8000
SPB2275	2275	SPB3825	3825	SPB8500	8500
SPB2280	2280	SPB4000	4000	SPB9010	9010
SPB2300	2300	SPB4060	4060		

Weitere Größen lieferbar / Other sizes available

Keilriemen SPC von PIX Europe

Belts SPC from PIX Europe

TYP	Wirklänge	TYP	Wirklänge	TYP	Wirklänge
SPC2000	2000	SPC3750	3750	SPC6700	6700
SPC2120	2120	4000SPC	4000	SPC7100	7100
SPC2240	2240	SPC4100	4100	SPC7500	7500
SPC2360	2360	SPC4250	4250	SPC8000	8000
SPC2500	2500	SPC4400	4400	SPC8500	8500
SPC2620	2620	SPC4500	4500	SPC9000	9000
SPC2650	2650	SPC4750	4750	SPC9500	9500
SPC2800	2800	SPC4900	4900	SPC10000	10000
SPC2890	2890	SPC5000	5000	SPC10500	10500
SPC3000	3000	SPC5300	5300	SPC10600	10600
SPC3150	3150	SPC5600	5600	SPC11200	11200
SPC3350	3350	SPC6000	6000	SPC12500	12500
SPC3550	3550	SPC6300	6300		

Weitere Größen lieferbar / Other sizes available

Andere Riementypen sind lieferbar. Other belts are available.